



DMP 457

Pressure Transmitter for Shipbuilding and Offshore

Stainless Steel Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 600 bar

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ LR-certificate (Lloyd's Register)
- ▶ DNV-approval (Det Norske Veritas)
- ▶ ABS-certificate (American Bureau of Shipping)
- ▶ CCS-certificate (China Classification Society)
- ▶ flush pressure port
G 1/2" from 100 mbar
- ▶ excellent thermal behaviour



Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gases and dusts
- ▶ welded pressure port

The pressure transmitter DMP 457 has been especially designed for rough conditions occurring especially in shipbuilding and offshore applications. All gaseous and liquid media, which are compatible with stainless steel 1.4404 (316L) respectively can be used.

Sensor element is a piezoresistive stainless steel sensor with high accuracy and excellent long-term stability. In order to meet the special requirements for shipbuilding and offshore applications extensive tests had to be passed to get the Lloyd's Register (LR), Det Norske Veritas (DNV) and China Classification Society (CCS) approvals.

Preferred areas of use are

-  Diesel engines, drives
Compressors, pumps
Boiler
Hydraulic and pneumatic control systems
-  Fuel and oil



DMP 457

Pressure Transmitter for Shipbuilding and Offshore

Technical Data

Input pressure range ¹												
Nominal pressure gauge	[bar]	-1 ... 0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6
Level gauge / abs.	[mH ₂ O]	-	1	1.6	2.5	4	6	10	16	25	40	60
Overpressure	[bar]	5	0.5	1	1	2	5	5	10	10	20	40
Burst pressure ≥	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50

Nominal pressure gauge	[bar]	10	16	25	40	60	100	160	250	400	600
Nominal pressure abs.	[bar]	10	16	25	40	60	100	160	250	400	600
Level gauge / abs.	[mH ₂ O]	100	160	250	400	-	-	-	-	-	-
Overpressure	[bar]	40	80	80	105	210	600	600	1000	1000	1000
Burst pressure ≥	[bar]	50	120	120	210	420	1000	1000	1250	-	-

Vacuum resistance $p_N \geq 1$ bar: unlimited vacuum resistance $p_N < 1$ bar: on request

¹ from 60 bar: measurement starts with ambient pressure

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$
Option IS-version	2-wire: 4 ... 20 mA / $V_S = 10 \dots 28 V_{DC}$

Performance	
Accuracy ²	standard: nominal pressure < 0.4 bar: $\leq \pm 0.5$ % FSO nominal pressure ≥ 0.4 bar: $\leq \pm 0.35$ % FSO option: nominal pressure ≥ 0.4 bar: $\leq \pm 0.25$ % FSO
Permissible load	$R_{max} = [(V_S - V_{S min}) / 0.02 A] \Omega$
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k Ω
Long term stability	$\leq \pm 0.1$ % FSO / year by reference conditions
Response time	< 10 msec

² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (offset and span)			
Nominal pressure p_N	[bar]	-1 ... 0	< 0.4
Tolerance band	[% FSO]	$\leq \pm 0.75$	$\leq \pm 1$
in compensated range	[°C]	-20 ... 85	0 ... 70

Permissible temperatures	
Medium	-40 ... 125°C
Electronics / environment	-40 ... 85°C
Storage	-40 ... 100°C





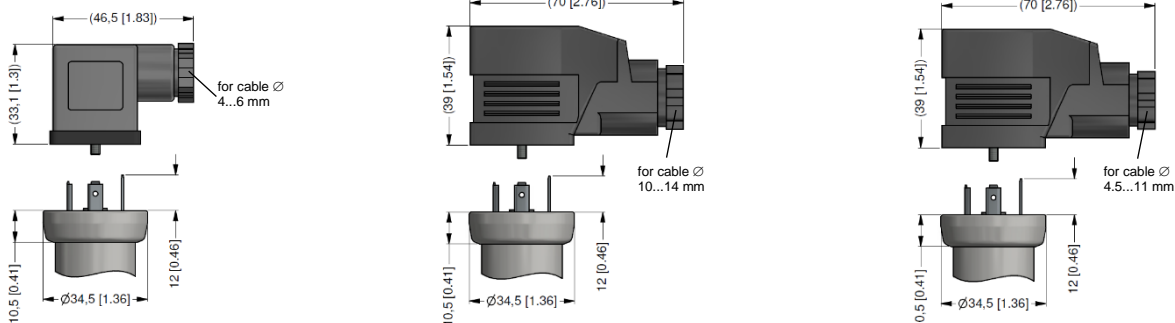
Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to - EN 61326 - DNV (Det Norske Veritas)

Mechanical stability	
Vibration	4 g (according to DNV: class B, curve 2 / basis: IEC 60068-2-6)


Materials	
Pressure port	stainless steel 1.4404 (316L)
Housing	standard: stainless steel 1.4404 (316L) option field housing: stainless steel 1.4404 (316L), with cable gland
Cable sheath	TPE -U (flame-resistant, halogen free, increased resistance against oil and gasoline, resistant against salt, sea water, heavy oil)
Seals (media wetted)	standard: FKM option: welded version ³ others on request
Diaphragm	stainless steel 1.4435 (316L)
Media wetted parts	pressure port, seals, diaphragm

³ welded version only with pressure ports according to EN 837; possible for nominal pressure ranges $p_N \leq 40$ bar

Category of the environment		
Lloyd's Register (LR)	EMV1, EMV2, EMV3, EMV4	number of certificate: 13/20055
Det Norske Veritas (DNV)	temperature: D humidity: B vibration: B electromagnetic compatibility: B enclosure: D	number of certificate: TAA00001GR

Explosion protection			
Approvals DX19-DMP 457	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIB T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da		
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $L_i \approx 0 \text{ }\mu\text{H}$ with field housing: $C_i = 105 \text{ nF}$ with cable outlet: $C_i = 84.7 \text{ nF}$ with ISO 4400: $C_i = 62.2 \text{ nF}$ the supply connections have an inner capacity of max. 90 nF (140 nF with field housing) to the housing		
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -40/-20 ... 70 °C		
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$		
Miscellaneous			
Current consumption	max. 25 mA		
Weight	approx. 140 g (with ISO 4400)		
Installation position	any ⁴		
Operational life	100 million load cycles		
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ⁵		
ATEX Directive	2014/34/EU		
⁴ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $p_N \leq 1 \text{ bar}$. ⁵ This directive is only valid for devices with maximum permissible overpressure > 200 bar			
Wiring diagram			
2-wire-system (current)			
			
Pin configuration			
Electrical connection	ISO 4400 	field housing (clamp section: 2.5 mm ²) 	cable colours (IEC 60757)
Supply +	1	VS+	WH (white)
Supply -	2	VS-	BN (brown)
Shield	ground pin 	GND	GYNE (green-yellow)
Electrical connections ⁶ (dimensions mm / in)			
			
ISO 4400 - Code G10 (IP 65)			
ISO 4400 - Code G00 (IP 65)			
ISO 4400 - Code G01 (IP 65)			
⁶ Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.			

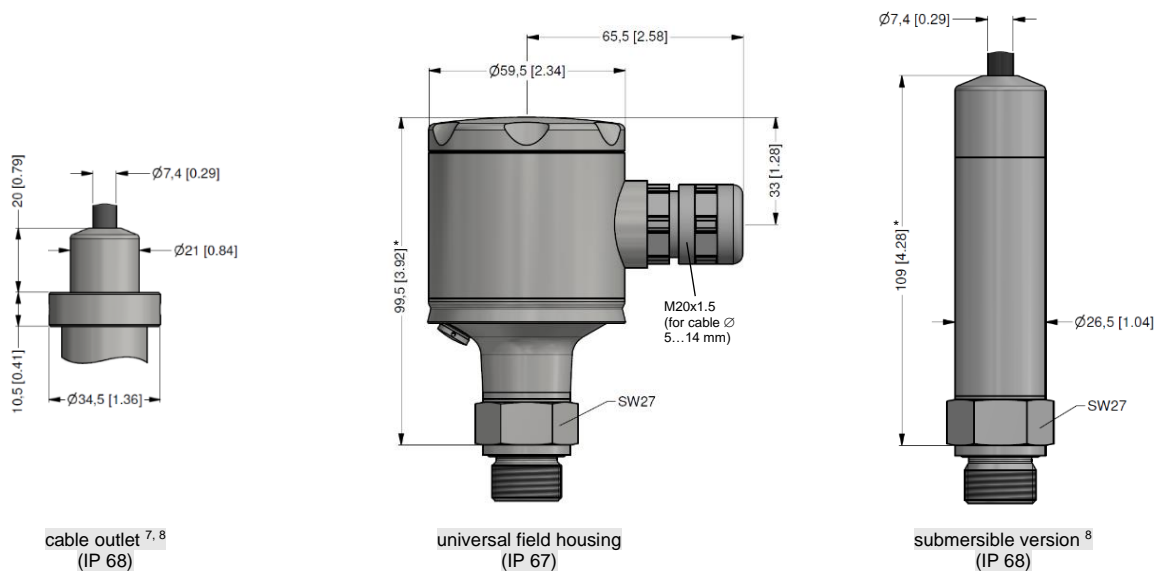Electrical connections ⁶ (dimensions mm / in)




⁶ Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.

⁷ tested at 4 bar or 40 mH₂O for 24 hours

⁸ shielded cable with integrated air tube for atmospheric reference (for nominal pressure ranges absolute, the air tube is closed); different lengths available

* total lengths increase by 9 mm for $p_N \geq 100$ bar with the optional accuracy $\leq \pm 0.25$ % FSO

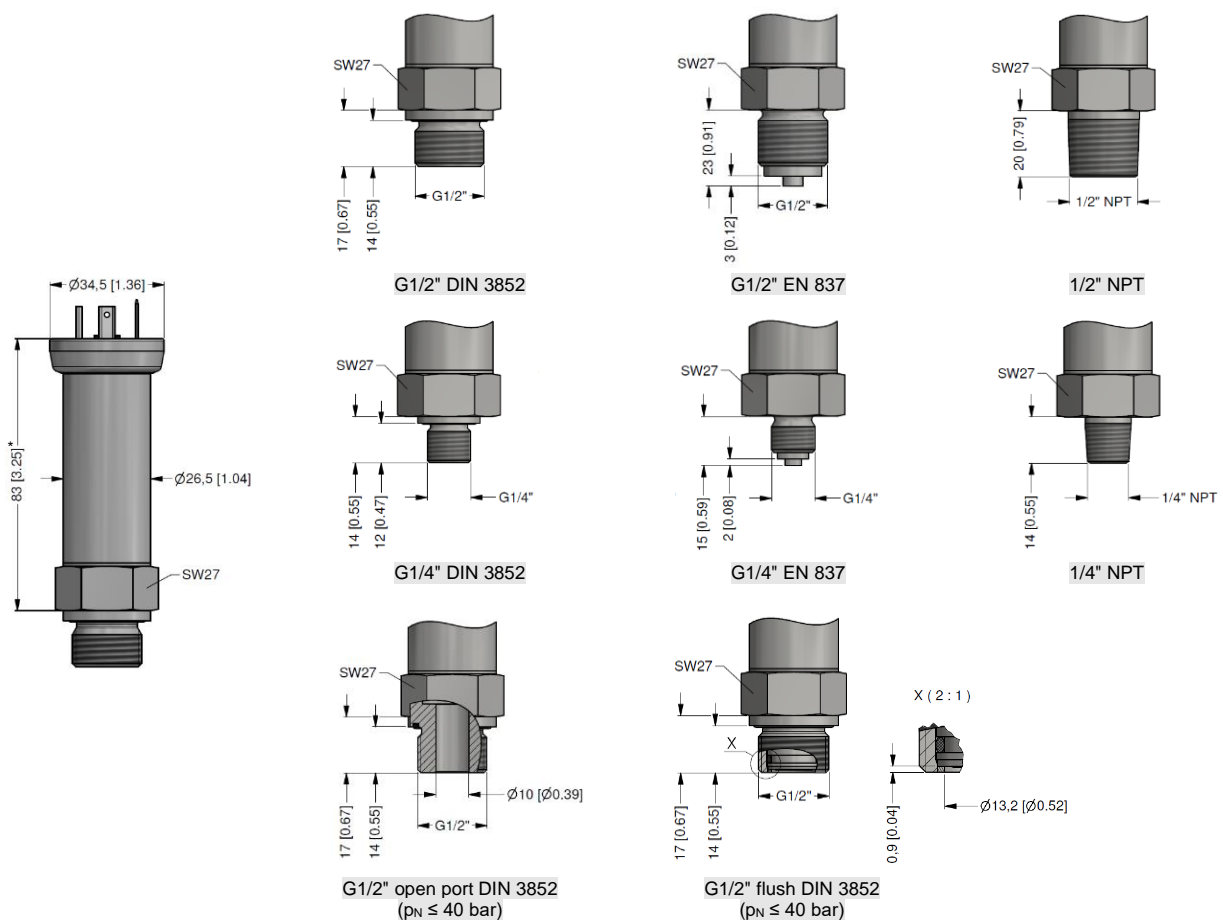Mechanical connections (dimensions mm / in)



* total lengths increase by 9 mm for $p_N \geq 100$ bar with the optional accuracy $\leq \pm 0.25$ % FSO

Ordering code DMP 457

DMP 457

			-					-		-		-				-				-		-			
--	--	--	---	--	--	--	--	---	--	---	--	---	--	--	--	---	--	--	--	---	--	---	--	--	--

Pressure		
	in bar, gauge ¹	6 0 0
	in bar, absolute ²	6 0 1
	in mH ₂ O, gauge ¹	6 0 2
	in mH ₂ O, absolute ²	6 0 3
Input	[mH ₂ O] [bar]	
	1.0 0.10 ²	1 0 0 0
	1.6 0.16 ²	1 6 0 0
	2.5 0.25 ²	2 5 0 0
	4.0 0.40	4 0 0 0
	6.0 0.60	6 0 0 0
	10 1.0	1 0 0 1
	16 1.6	1 6 0 1
	25 2.5	2 5 0 1
	40 4.0	4 0 0 1
	60 6.0	6 0 0 1
	100 10	1 0 0 2
	160 16	1 6 0 2
	250 25	2 5 0 2
	400 40	4 0 0 2
	60	6 0 0 2
	100	1 0 0 3
	160	1 6 0 3
	250	2 5 0 3
	400	4 0 0 3
	600	6 0 0 3
	-1 ... 0	X 1 0 2
	customer	9 9 9 9
Output		
	4 ... 20 mA / 2-wire	1
	intrinsic safety 4 ... 20 mA / 2-wire	E
	customer	9
Accuracy		
	standard for p _N ≥ 0,4 bar:	0.35 % FSO
	standard for p _N < 0,4 bar:	0.50 % FSO
	option for p _N ≥ 0,4 bar:	0.25 % FSO
	customer	9
Electrical connection		
	male and female plug ISO 4400 (for cable Ø 4...6 mm)	G 1 0
	male and female plug ISO 4400 GL ³ (for cable Ø 10...14 mm)	G 0 0
	male and female plug ISO 4400 GL ³ (for cable Ø 4,5...11 mm)	G 0 1
	cable outlet (TPE-U-cable) ⁴	T R 3
	field housing stainless steel (316L)	8 8 0
	submersible version (1.4404 / 316L) with TPE-U-cable ⁴	T T 3
	customer	9 9 9
Mechanical connection		
	G1/2" DIN 3852	1 0 0
	G1/2" EN 837	2 0 0
	G1/4" DIN 3852	3 0 0
	G1/4" EN 837	4 0 0
	G 1/2" DIN 3852 with flush sensor ⁵	F 0 0
	G1/2" DIN 3852 open pressure port ⁵	H 0 0
	1/2" NPT	N 0 0
	1/4" NPT	N 4 0
	customer	9 9 9
Seals		
	FKM	1
	without (welded version) ⁶	2
	customer	9
Special version		
	standard	0 0 0
	customer	9 9 9

¹ from 60 bar: measurement starts with ambient pressure² absolute pressure possible from 0.4 bar³ cable socket is GL-approved⁴ shielded TPE-U-cable with ventilation tube available in different lengths⁵ only for $p_N \leq 40$ bar possible

⁶ welded version only with pressure ports according to EN 837; possible with pressure ranges $p_N \leq 40$ bar