


EXmatic 470 electro pneumatic - programmable

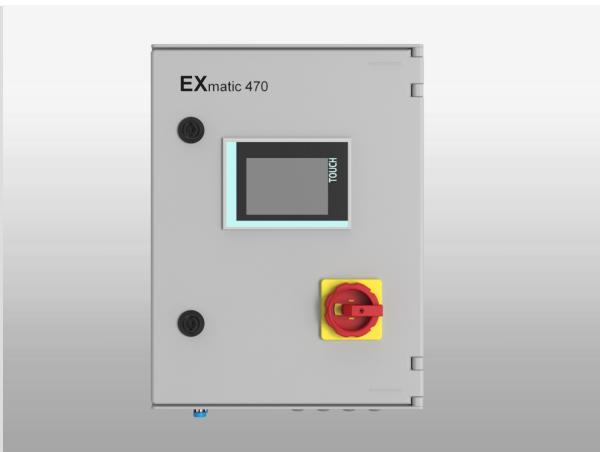


- » Full automatic measuring point
- » High extension of sensor-lifetime and reducing of servicing efforts
- » Open system - operates with any kind of transmitter
- » Output signals for connecting with PCS
- » Three different cleaning solutions usable
- » Sealing water function
- » Pre- and post-cleaning function

EXmatic 470 is an electro-pneumatic control unit for fully automatic control of pneumatic retractable probe housings of EXtract 8XX series with integrated connection hose for "plug and play" installation and individual programming.

Spezifikationen

Voltage supply:	24 V DC / 30 VA
Air supply:	compressed air 6 bar
Input for ext. trigger:	24 V DC internal power supply for potentialfree contact
Current consumption:	1,6 A max.
Output ext. relays:	24 V DC max. 250 mA
Output pump:	24 V DC max. 250 mA
Output alarm contacts:	24 V DC max. 100 mA
Housing material:	glass-reinforced plastic or stainless steel
Housing dimensions:	300 x 400 x 200 mm
Ambient temperature:	0...+55 °C
Type of protection:	IP54

Abmessungen

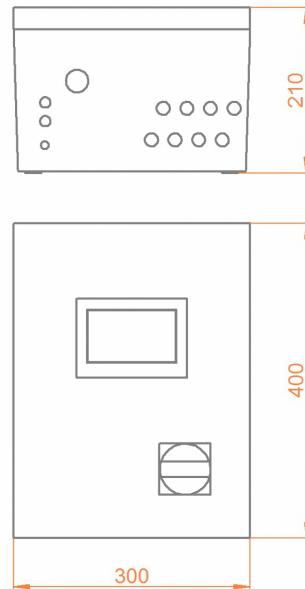

EXmatic 470 electro pneumatic - programmable



EXconnect connected to retractable probe housing



Measuring point with probe housing, flow-through fitting and control unit

Ordercode

Code	Housing	Lieferzeit
GF0	Plastic housing without Display	4 Wochen
GF1	Plastic housing with Display	4 Wochen
SS0	Stainless steel housing without Display	4 Wochen
SS1	Stainless steel housing with Display	4 Wochen
Code	Cleaning	Lieferzeit
1	for one cleaning solution	3 Wochen
2	for two cleaning solutions	3 Wochen
3	for three cleaning solutions	3 Wochen
Code	Length of connecting hose	Lieferzeit
00	without	3 Wochen
03	3 meters	3 Wochen
05	5 meters	3 Wochen
10	10 meters	3 Wochen
Code	Maintenance unit compressed air	Lieferzeit
0	without	3 Wochen
1	with integrated maintenance unit	4 Wochen
Code	Interface	Lieferzeit
EN	without	3 Wochen