

EXflow 710 Flow-through fitting - stainless steel / ETFE lined




- » DN25 / 1" or DN50 / 2"
- » Flow direction 90° or 180°
- » Stainless steel AISI 316Ti / 1.4571 or ETFE-lined (conductive version as option)
- » Many different variations
- » Up to 16 bar and 140 °C
- » Version with flange DN50 / 2" on request with PFA-lining (natural or conductive) in stainless steel 1.4571 or steel P235GH (coated)

The flow-through fitting EXflow 710 is an exactly matching accessory for retractable housings. It is especially designed for the product types EXtract 810 and 810M and the static fitting EXstatic 310.

Spezifikationen

Material:	1.4571 / 316Ti optional ETFE-lined
Process pressure:	max. 16 bar
Process temperature:	max. 140 °C
Process connection:	Flange DN25 / DN50 / ANSI 1" / ANSI 2", welding connection
Sensor connection:	Flange DN50 / ANSI 2", Thread G1 1/4" / G3/4" / NPT3/4"
Flow direction:	90° or 180°

Abmessungen

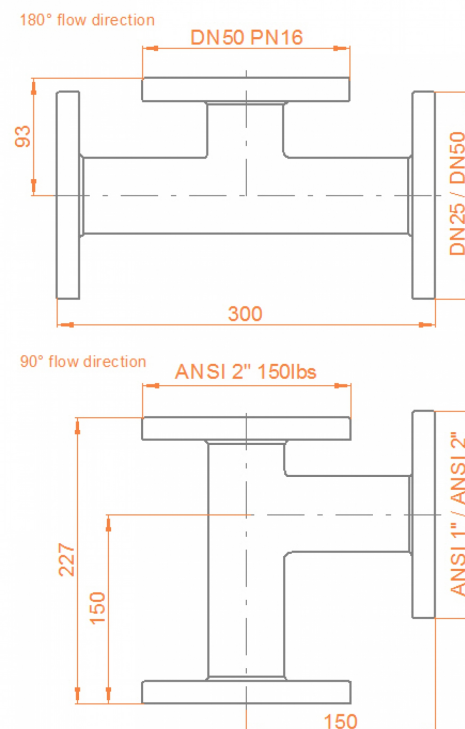

EXflow 710 Flow-through fitting - stainless steel / ETFE lined



EXconnect connected to retractable probe housing

Ordercode

Code	Material	Lieferzeit
71	Stainless steel 1.4571 / 316Ti	3 Wochen
ET	Stainless steel 1.4571 / 316Ti ETFE lined	6 Wochen

Code	Process connection	Lieferzeit
D25	Flange DN 25	3 Wochen
D50	Flange DN50 PN16	3 Wochen
A10	Flange ANSI 1"	3 Wochen
A20	Flange ANSI 2" 150lbs	3 Wochen
W25	Welding pipe DN 25/1" (not option "ET")	3 Wochen
W50	Welding pipe DN 50/2" (not option "ET")	3 Wochen

Code	Holder- /Sensor- connection	Lieferzeit
D50	Flange DN50	3 Wochen
A20	Flange ANSI 2"	3 Wochen
I25	G1 1/4" socket (not option "ET")	3 Wochen
N34	Female thread NPT 3/8" (not option "ET")	3 Wochen
G34	Female thread G3/4" (not option "ET")	3 Wochen

Code	Flow direction	Lieferzeit
18	180°	3 Wochen
09	90°	3 Wochen