

Superheated steam flow measurement

Permanently installed non-invasive ultrasonic measuring system

Features

- Exact and highly reliable measurement of superheated steam up to 400 °C
- Installation and start-up do not require any pipe work nor any process interruptions
- Volumetric and mass flow rate available without additional steam calculator
- Non-invasive and wear-free measurement without pressure loss
- Maintenance-free acoustic coupling using permanent coupling foil
- Bi-directional measurement over a wide turndown ratio - up to 25:1
- Advanced self-diagnosis and possibilities for event-based triggering of data recording
- Bidirectional communication and support of common bus technologies
- Transmitter and transducers are separately calibrated (traceable to national standards)
- The measurement is zero point stable and drift free

Applications

- Process control
- Consumption metering
- Check metering



FLUXUS G722ST-HT (aluminum housing)



FLUXUS G722ST-HT (stainless steel housing)



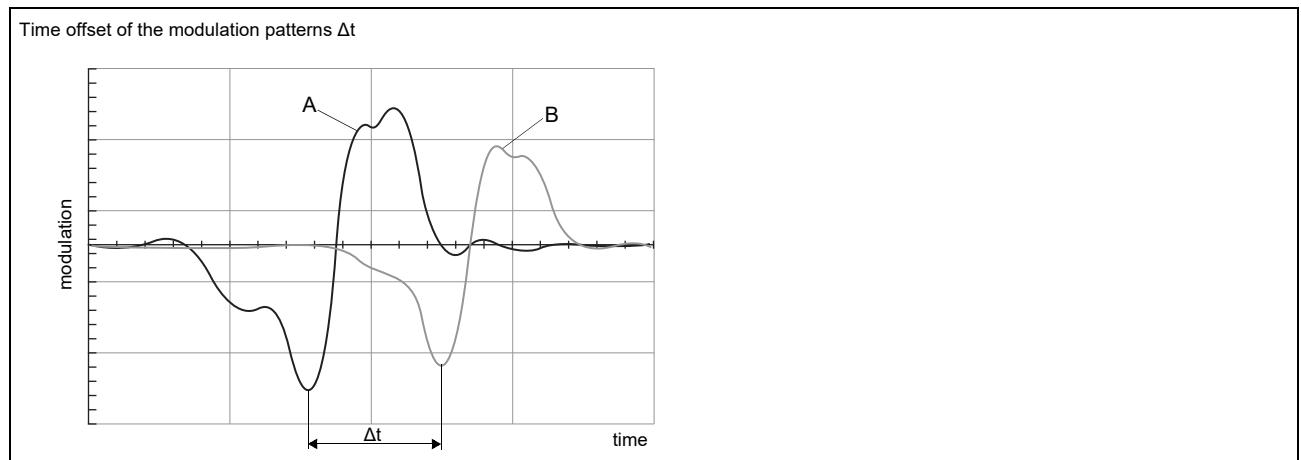
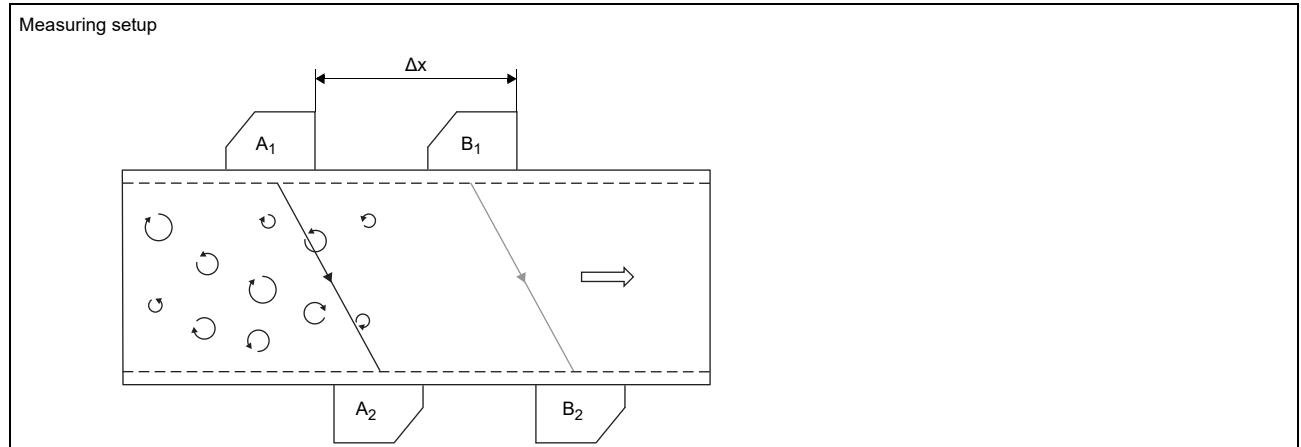
WavelInjector

Function	3
Measurement principle	3
Calculation of volumetric flow rate	3
 Transmitter	4
Technical data	4
Dimensions	7
2" pipe mounting kit	8
Terminal assignment	9
 Transducers	10
Transducer selection	10
Transducer order code	11
Technical data	12
 Transducer mounting fixture	17
 Coupling materials for transducers	18
 Connection systems	19
 Junction box	21
Technical data	21
Dimensions	22
2" pipe mounting kit	22
 Clamp-on temperature probe (optional)	23
Technical data	23
Fixation	24
Junction box	25

Function

Measurement principle

The flow velocity of the fluid is measured using the correlation principle. 2 pairs of ultrasonic transducers are mounted one after the other at a distance Δx on the pipe. The transducer pairs form the measuring barriers A and B. Ultrasonic signals are alternately emitted by the emitters A_1 and B_1 and received by the respective receivers A_2 and B_2 . The ultrasonic signals are modulated regarding amplitude and phase by the swirls of the turbulent flowing fluid. Since the swirls move with the flow, they pass the measuring barriers A und B with a time offset Δt , so that the modulation patterns of the ultrasonic signals of measuring barrier A and B are also offset by Δt . This time offset Δt is measured by means of cross correlation of the modulation signals.



Calculation of volumetric flow rate

$$\dot{V} = A \cdot v = A \cdot k_{Re} \cdot \frac{\Delta x}{\Delta t}$$

where

- \dot{V} - operating volumetric flow rate
- A - cross-sectional pipe area
- v - flow velocity
- k_{Re} - fluid mechanics calibration factor
- Δx - distance between measuring barriers
- Δt - time offset of the modulation patterns

Transmitter

Technical data

	FLUXUS G722ST-NN0*A G722ST-NN0*S	FLUXUS G722ST-A20*A G722ST-A20*S	FLUXUS G722ST-F20*A G722ST-F20*S		
					
design	standard field device	standard field device zone 2	standard field device FM Class I Div. 2		
application	high-temperature steam measurement ¹				
measurement					
measurement principle	cross correlation principle				
flow velocity	m/s	depending on the application			
repeatability		$\pm 1\% \text{ MV} (\text{Re} > 60\,000)$ $\pm 3\% \text{ MV} (\text{Re} 10\,000...60\,000)$			
Reynolds number		$\text{Re} > 10\,000$			
fluid		saturated steam, superheated steam			
fluid pressure	bar (a)	1...110			
fluid temperature	°C	100...400			
measurement uncertainty (volumetric flow rate)					
measurement uncertainty at the measuring point		$\pm 3\% \text{ MV} (\text{Re} > 60\,000)$ $\pm 4\% \text{ MV} (\text{Re} 10\,000...60\,000)$			
transmitter					
power supply		<ul style="list-style-type: none"> • 100...230 V/50...60 Hz or • 20...32 V DC or • 11...16 V DC 			
power consumption	W	< 15			
measuring setup		2 transducer pairs of the same type required (see measuring setup in section Measurement principle)			
damping	s	0...100 (adjustable)			
measuring cycle	Hz	0.7...2 (depending on the application)			
response time	s	10...35 (depending on the application)			
housing material		aluminum, powder coated or stainless steel 316L (1.4404)			
degree of protection		IP66	aluminum housing: IP66/NEMA 4X stainless steel housing: IP65		
dimensions	mm	see dimensional drawing			
weight	kg	aluminum housing: 5.4 stainless steel housing: 5.1			
fixation		wall mounting, optional: 2" pipe mounting			
ambient temperature	°C	-40...+60 (< -20 without operation of the display)	aluminum housing: -40...+55/60 (< -20 without operation of the display) stainless steel housing: -20...+55/60		
display		128 x 64 pixels, backlight			
menu language		English, German, French, Spanish, Dutch, Russian, Polish, Turkish, Italian			
explosion protection					
• ATEX/IECEx					
marking	-	C E 0637 Ex II3G II2D Ex nA nC ic IIC T4 Gc Ex tb IIIC T120 °C Db T _a -40...+60 °C	-		
certification ATEX	-	IEExU11ATEX1015	-		
certification IECEx	-	IECEx IBE 11.0008	-		
• FM					
marking	-	-	G722**-F20*S2, G722**-F20*S3:  NI/Cl. I,II,III/Div. 2/ GP. A,B,C, D,E,F,G/ T5		
			G722**-F20*S1:  NI/Cl. I,II,III/Div. 2/ GP. A,B,C, D,E,F,G/ T4A		

¹ test measurement to validate the application required in advance

² outside the explosive atmosphere (housing cover open)

	FLUXUS G722ST-NN0*A G722ST-NN0*S	FLUXUS G722ST-A20*A G722ST-A20*S	FLUXUS G722ST-F20*A G722ST-F20*S
measuring functions			
physical quantities	operating volumetric flow rate, mass flow rate, flow velocity		
totaliser	volume, mass		
diagnostic functions	crest factor, peak width, symmetry of amplification		
communication interfaces			
service interfaces	measured value transmission, parametrisation of the transmitter: • USB ² • LAN ²		
process interfaces	max. 1 option: • RS485 (ASCII sender) • Modbus RTU • BACnet MS/TP • HART • Profibus PA • FF H1 • Modbus TCP • BACnet IP		
accessories			
data transmission kit	USB cable		
software	• FluxDiagReader: reading of measured values and parameters, graphical presentation • FluxDiag (optional): reading of measurement data, graphical presentation, report generation, parametrisation of the transmitter		
data logger			
loggable values	all physical quantities, totalised physical quantities and diagnostic values		
capacity	max. 800 000 measured values		
outputs			
	The outputs are galvanically isolated from the transmitter.		
number	on request		
• switchable current output			
	All switchable current outputs are jointly switched to active or passive.		
range	mA	4...20 (3.2...22)	
accuracy		0.04 % MV ±3 µA	
active output		$R_{ext} < 350 \Omega$	
passive output		$U_{ext} = 8...30$ V, depending on R_{ext} ($R_{ext} < 1 \text{ k}\Omega$ at 30 V)	
• HART			
range	mA	4...20	
accuracy		0.1 % MV ±15 µA	
active output		$U_{int} = 24$ V, $R_{ext} < 500 \Omega$	
passive output		$U_{ext} = 10...24$ V DC, depending on R_{ext} ($R_{ext} < 1 \text{ k}\Omega$ at 24 V)	
• voltage output			
range	V	0...1 or 0...10	
accuracy		0...1 V: 0.1 % MV ±1 mV 0...10 V: 0.1 % MV ±10 mV	
internal resistance		$R_{int} = 500 \Omega$	
• digital output			
functions		• frequency output • binary output • pulse output	
number		3	
operating parameters		5...30 V/< 100 mA	
frequency output			
• range	kHz	0...5	
binary output			
• binary output as alarm output		limit, change of flow direction or error	
pulse output			
• functions		mainly for totalising	
• pulse value	units	0.01...1000	
• pulse width	ms	0.05...1000	

¹ test measurement to validate the application required in advance² outside the explosive atmosphere (housing cover open)


	FLUXUS G722ST-NN0*A G722ST-NN0*S	FLUXUS G722ST-A20*A G722ST-A20*S	FLUXUS G722ST-F20*A G722ST-F20*S
inputs			
	The inputs are galvanically isolated from the transmitter.		
number	max. 4, on request		
• temperature input			
type	Pt100/Pt1000		
connection	4-wire		
range	°C	-150...+560	
resolution	K	0.01	
accuracy		±0.01 % MV ±0.03 K	
• current input			
accuracy		0.1 % MV ±10 µA	
active input		$U_{int} = 24 \text{ V}$, $R_{int} = 50 \Omega$, $P_{int} < 0.5 \text{ W}$, not short-circuit proof	
• range	mA	0...20	
passive input		$R_{int} = 50 \Omega$, $P_{int} < 0.3 \text{ W}$	
• range	mA	-20...+20	
• voltage input			
range	V	0...1	
accuracy		0.1 % MV ±1 mV	
internal resistance		$R_{int} = 1 \text{ M}\Omega$	

¹ test measurement to validate the application required in advance


² outside the explosive atmosphere (housing cover open)

Dimensions

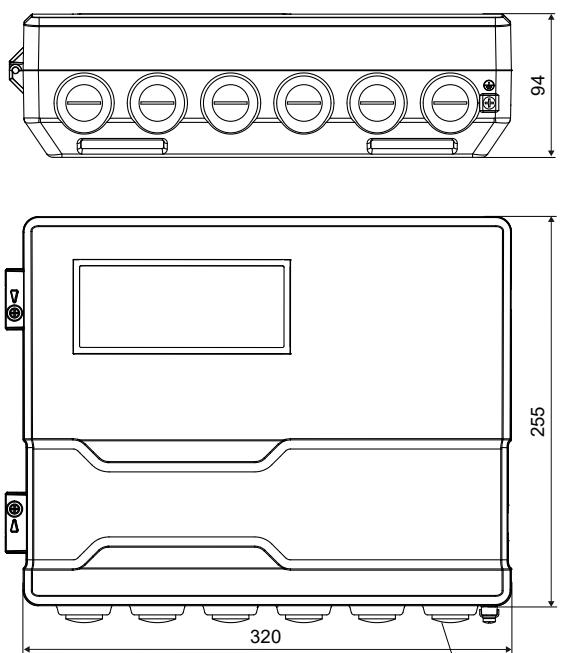*72***-****A




in mm

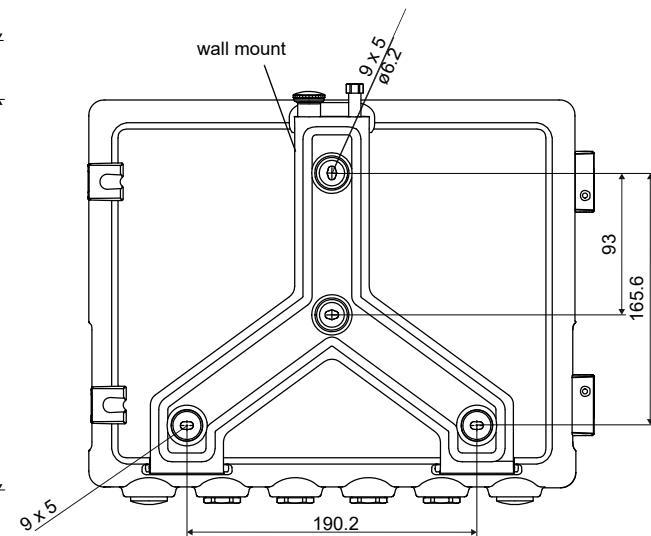


thread: 6x M20 x 1.5
cable gland: max. 6x M20

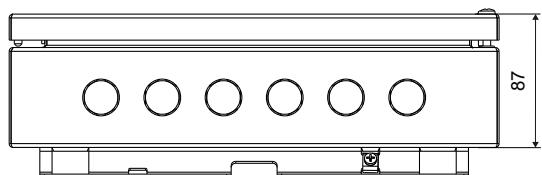*72***-****S





240

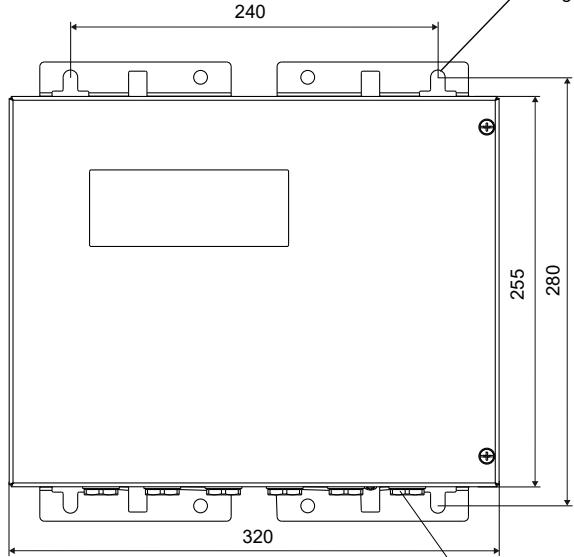fixing holes for wall mounting




in mm

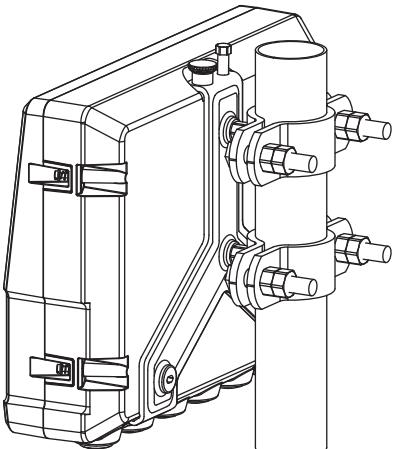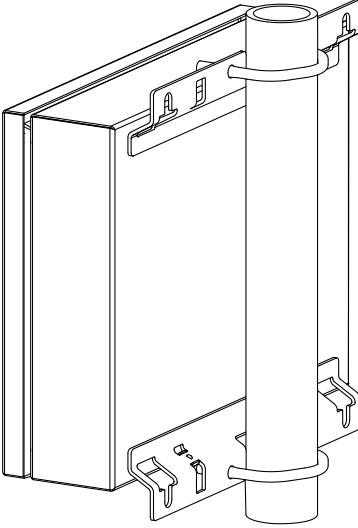2" pipe mounting kit

*72***-****A		order code: ACC-PE-*721-/PMK4
*72***-****S		order code: ACC-PE-*721-/PMK6

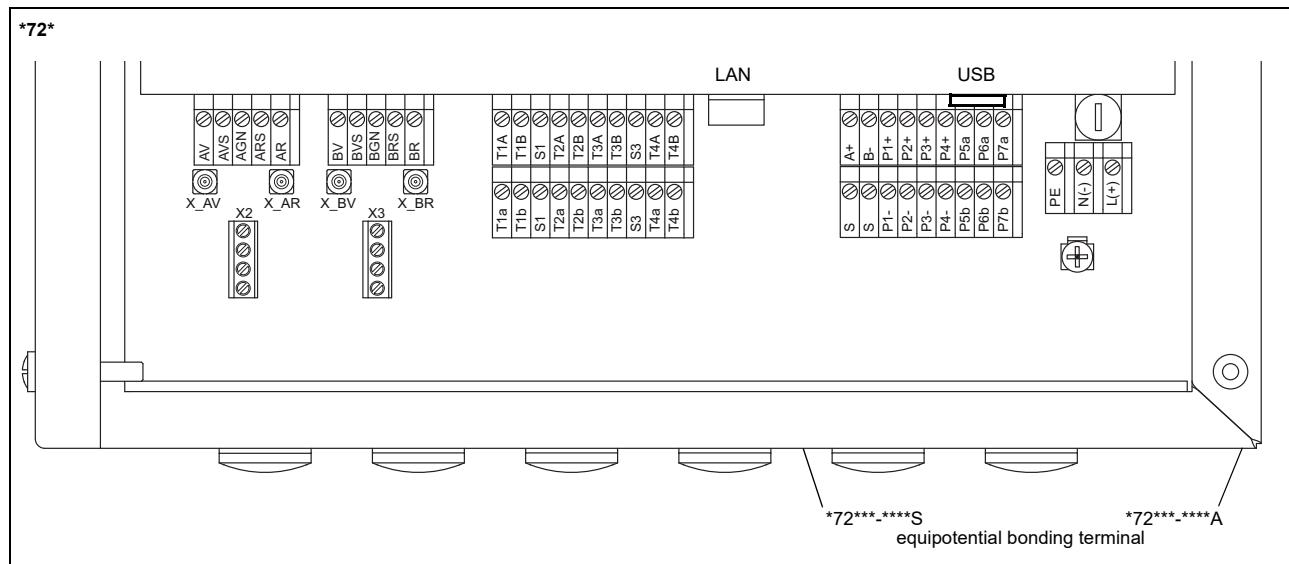Terminal assignment



power supply ¹									
terminal		connection (AC)		connection (DC)					
PE		earth				earth			
N(-)		neutral				-			
L(+)		phase				+			
transducers									
transducer cable (transducers ****8*), extension cable				transducer cable (transducers ****52)					
measuring channel A		measuring channel B		transducer	measuring channel A	measuring channel B			
terminal	connection	terminal	connection		terminal	terminal	connection		
AV	signal	BV	signal		X_AV	X_BV	SMB connector		
AVS	shield	BVS	shield		X_AR	X_BR	SMB connector		
ARS	shield	BRS	shield						
AR	signal	BR	signal						
outputs ^{1, 2}									
terminal	connection				terminal	connection	communication interface		
P1+...P4+	current output, voltage output, HART (P1)				A+	signal +	• RS485 ¹		
P1-...P4-					B-	signal -	• Modbus RTU ¹		
P5a...P7a	digital output				S	shield	• BACnet MS/TP ¹		
P5b...P7b					USB	type B Hi-Speed USB 2.0 Device	• Profibus PA ¹		
					LAN	RJ45 10/100 Mbps Ethernet	• FF H1 ¹		
analog inputs ^{1, 2}									
terminal	temperature probe				passive sensor	active sensor			
terminal	direct connection		connection with extension cable		connection	connection			
T1a...T4a	red		red		not connected	not connected			
T1A...T4A	red/blue		grey		-	+			
T1b...T4b	white/blue		blue		+	not connected			
T1B...T4B	white		white		not connected	-			
S1, S3	shield		shield		not connected	not connected			

¹ cable (by customer):

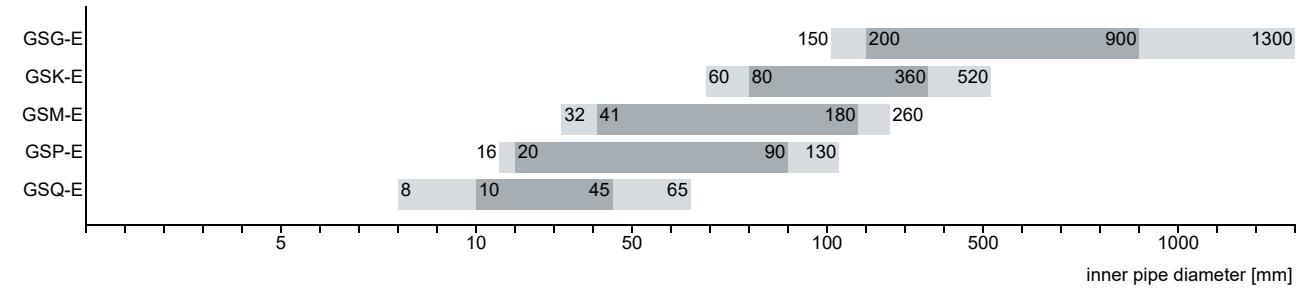
- e.g. flexible wires, with insulated wire ferrules, wire cross-section: 0.25...2.5 mm²
- outer diameter of the cable (*72***-****S with ferrite nut): max. 7.6 mm

² The number, type and terminal assignment are customised.


Transducers

Transducer selection


transducer order code



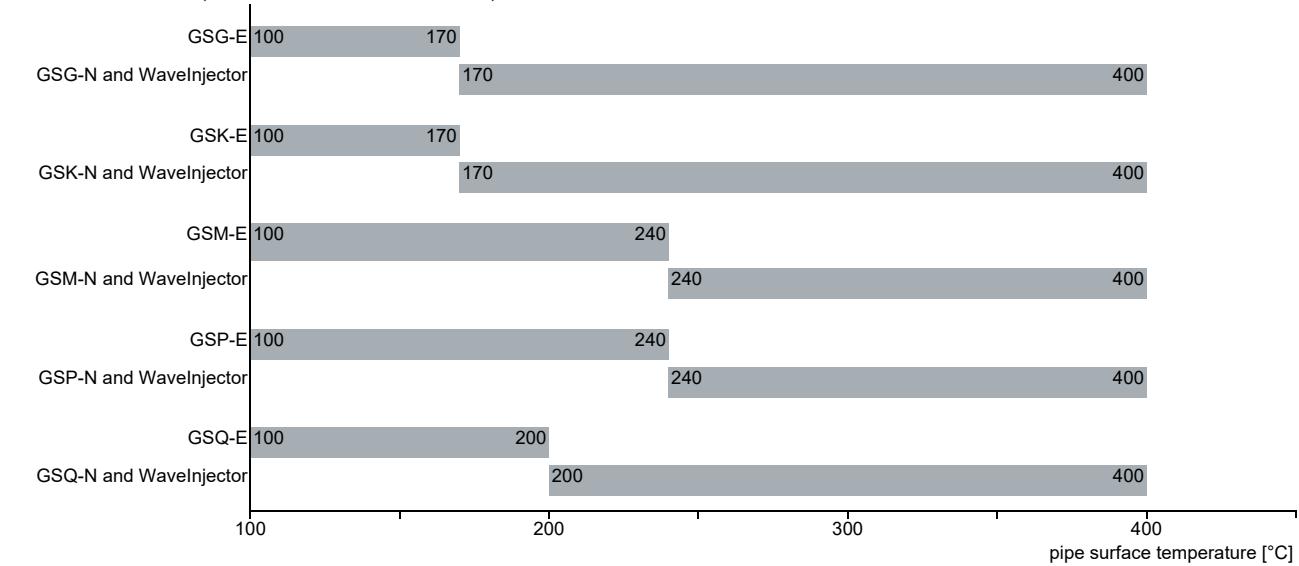transducer order code (zone 2 - FM Class I Div. 2 - nonEx)



transducer order code (zone 1)

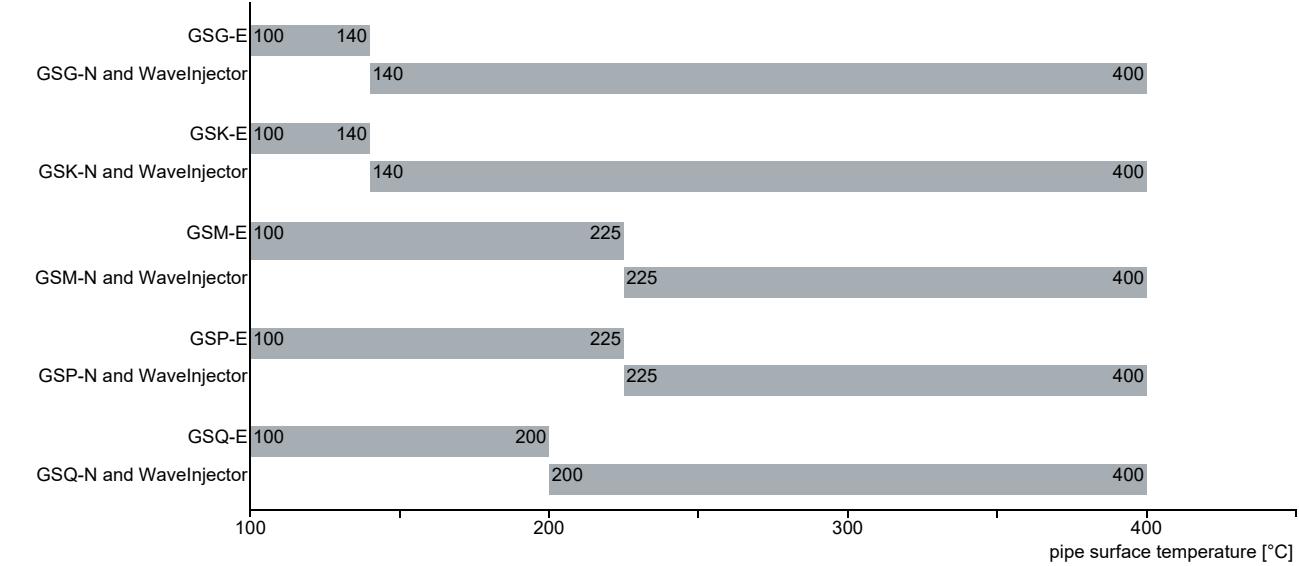

recommended

possible

Transducer order code



1, 2 transducer	3 transducer frequency	4 ambient temperature	5, 6 explosion protection	7, 8 connection system	9...11 extension cable	/ option	no. of character description
GS							set of ultrasonic flow transducers, shear wave
	G						0.2 MHz
	K						0.5 MHz
	M						1 MHz
	P						2 MHz
	Q						4 MHz
		N					normal temperature range
		E					extended temperature range
			NN				not explosion-proof
			A2				ATEX zone 2/IECEx zone 2
			A1				ATEX zone 1/IECEx zone 1
			F2				FM Class I Div. 2
				TS			with SMB connector
				T1			with stripped cable ends
				XXX			0 m: without extension cable > 0 m: with extension cable
					LC		long transducer cable
					OS		housing with stainless steel 316

Technical data

Shear wave transducers (zone 2 - FM Class I Div. 2 - nonEx, TS)

order code	GSG-N**TS/**	GSK-N**TS/**	GSM-N**TS/**	GSP-N**TS/**	GSQ-N**TS/**
technical type	G(DL)G1N52	G(DL)K1N52	G(DL)M2N52	G(DL)P2N52	G(DL)Q2N52
transducer frequency/MHz	0.2	0.5	1	2	4
inner pipe diameter d					
min. extended	mm	180	70	37	18
min. recommended	mm	240	100	48	24
max. recommended	mm	920	370	180	90
max. extended	mm	1300	520	260	130
pipe wall thickness					
min.	mm	11.1	4.4	2.2	1.1
material					
housing		PEEK with stainless steel cover 304 (1.4301), ***-*****/OS: 316L (1.4404)			
contact surface		PEEK			
degree of protection		IP67			
transducer cable					
type		1699			
length	m	5	4		3
length (**-*****/LC)	m	9			
dimensions					
length l	mm	129.5	126.5	64	40
width b	mm	51	51	32	22
height h	mm	67	67.5	40.5	25.5
dimensional drawing					
weight (without cable)	kg	0.47	0.36	0.066	0.016
pipe surface temperature					
min.	°C	-40			
max.	°C	+130			
ambient temperature					
min.	°C	-40			
max.	°C	+130			
temperature compensation		x			
explosion protection					
• ATEX/IECEx					
order code	GSG-NA2TS/**	GSK-NA2TS/**	GSM-NA2TS/**	GSP-NA2TS/**	GSQ-NA2TS/**
pipe surface temperature (Ex)					
• min.	°C	-55			
• max.	°C	gas: +190, dust: +180			
marking		CE0637 Ex II3G Ex nA IIC T6...T3 Gc Ex tb IIIC T80 °C...T185 °C Db			
certification ATEX		IBExU10ATEX1163 X			
certification IECEx		IECEx BE 12.0005X			
• FM					
order code	GSG-NF2TS/**	GSK-NF2TS/**	GSM-NF2TS/**	GSP-NF2TS/**	GSQ-NF2TS/**
pipe surface temperature (Ex)					
• min.	°C	-40			
• max.	°C	+125	+190		
degree of protection		IP66			
marking		 NI/Cl. I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ Temp. Codes dwg 3860			

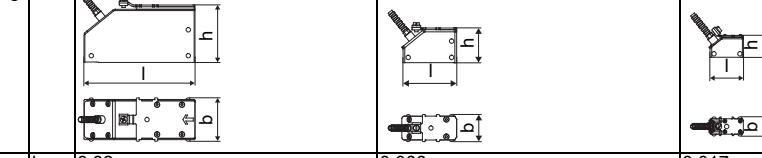Shear wave transducers (zone 2 - FM Class I Div. 2 - nonEx, TS, extended temperature range)

order code		GSG-ENNTS/**	GSK-ENNTS/**	GSM-E**TS/**	GSP-E**TS/**	GSQ-E**TS/**
technical type		G(DL)G1E52	G(DL)K1E52	G(DL)M2E52	G(DL)P2E52	G(DL)Q2E52
transducer frequency	MHz	0.2	0.5	1	2	4
inner pipe diameter d						
min. extended	mm	150	60	32	16	8
min. recommended	mm	200	80	41	20	10
max. recommended	mm	900	360	180	90	45
max. extended	mm	1300	520	260	130	65
pipe wall thickness						
min.	mm	11.1	4.4	2.2	1.1	0.6
material						
housing		PPSU with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)	PI with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)			
contact surface		PPSU	PI			
degree of protection		IP65	IP56			
transducer cable						
type		1699	6111			
length	m	5	4		3	
length (***/****/LC)	m	9	9			
dimensions						
length l	mm	129.5	64	40		
width b	mm	51	32	22		
height h	mm	67	40.5	25.5		
dimensional drawing						
weight (without cable)	kg	0.82	0.066	0.017		
pipe surface temperature						
min.	°C	100	100	100		
max.	°C	180	240 ¹	200		
ambient temperature						
min.	°C	-40	-30	-30		
max.	°C	+180	+40 ² +60 ² +200 ³	+200		
temperature compensation		x	x			
explosion protection						
• ATEX/IECEx						
order code		-	-	GSM-EA2TS/**	GSP-EA2TS/**	GSQ-EA2TS/**
pipe surface temperature (Ex)						
• min.	°C	-	-	-45		
• max.	°C	-	-	gas: +235 ¹ , dust: +225 ¹		
marking		-	-	 Ex nA IIC T6...T2 Gc Ex tb IIIA T80 °C...230 °C Db		
certification ATEX		-	-	IBExU10ATEX1163 X		
certification IECEx		-	-	IECEx IBE 12.0005X		
• FM						
order code		-	-	GSM-EF2TS/**	GSP-EF2TS/**	GSQ-EF2TS/**
pipe surface temperature (Ex)						
• min.	°C	-	-	-40		
• max.	°C	-	-	+235 ¹		
degree of protection		-	-	IP66		
marking		-	-	 NI/CI. I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ Temp. Codes dwg 3860		

¹ > +200 °C:

Variofix C without cover

observe the insulation instruction

Ex: ambient temperature max. +40 °C

² pipe surface temperature +200...+240 °C: Variofix C without cover³ pipe surface temperature max. +200 °C

Shear wave transducers (zone 1, T1)

order code	GSG-N*1T1/**	GSK-N*1T1/**	GSM-N*1T1/**	GSP-N*1T1/**	GSQ-N*1T1/**
technical type	G(DL)G1N81	G(DL)K1N81	G(DL)M2N81	G(DL)P2N81	G(DL)Q2N81
transducer frequency MHz	0.2	0.5	1	2	4
inner pipe diameter d					
min. extended	mm	180	70	37	18
min. recommended	mm	240	100	48	24
max. recommended	mm	920	370	180	90
max. extended	mm	1300	520	260	130
pipe wall thickness					
min.	mm	11.1	4.4	2.2	1.1
material					
housing		PEEK with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)			
contact surface		PEEK			
degree of protection		IP65	IP66		IP65
transducer cable					
type		1699			
length	m	5	4		3
length (***/****/LC)	m	9			
dimensions					
length l	mm	129.5	126.5	64	40
width b	mm	51	51	32	22
height h	mm	67	67.5	40.5	25.5
dimensional drawing					
weight (without cable)	kg	0.47	0.36	0.066	0.016
pipe surface temperature					
min.	°C	-40			
max.	°C	+130			
ambient temperature					
min.	°C	-40			
max.	°C	+130			
temperature compensation		x			
explosion protection					
• ATEX/IECEx					
order code		GSG-NA1T1/**	GSK-NA1T1/**	GSM-NA1T1/**	GSP-NA1T1/**
pipe surface temperature (Ex)					
• min.	°C	-55			
• max.	°C	+180			
marking		CE 0637 Ex II2G II2D Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T185 °C Db			
certification ATEX		IBExU07ATEX1168 X			
certification IECEx		IECEx IBE 08.0007X			

Shear wave transducers (zone 1, T1, extended temperature range)

order code		GSG-E*1T1/**	GSK-E*1T1/**		
technical type		G(DL)G1E83	G(DL)K1E83		
transducer frequency	MHz	0.2	0.5		
inner pipe diameter d					
min. extended	mm	150	60		
min. recommended	mm	200	80		
max. recommended	mm	900	360		
max. extended	mm	1300	520		
pipe wall thickness					
min.	mm	11.1	4.4		
material					
housing		PPSU with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)			
contact surface		PPSU			
degree of protection		IP65			
transducer cable					
type		1699			
length	m	5			
length (***/****/LC)	m	9			
dimensions					
length l	mm	129.5			
width b	mm	51			
height h	mm	67			
dimensional drawing					
weight (without cable)	kg	0.82			
pipe surface temperature					
min.	°C	100			
max.	°C	180			
ambient temperature					
min.	°C	-40			
max.	°C	+180			
temperature compensation		x			
explosion protection					
• ATEX/IECEx					
order code		GSG-EA1T1/**	GSK-EA1T1/**		
pipe surface temperature (Ex)					
• min.	°C	-50			
• max.	°C	+155			
marking		CE 0637 II2G Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T160 °C Db			
certification ATEX		IIBExU07ATEX1168 X			
certification IECEx		IECEx IBE 08.0007X			

Shear wave transducers (zone 1, T1, extended temperature range)

order code	GSM-E*1T1/**	GSP-E*1T1/**	GSQ-E*1T1/**
technical type	G(DL)M2E85	G(DL)P2E85	G(DL)Q2E85
transducer frequency MHz	1	2	4
inner pipe diameter d			
min. extended	mm 32	16	8
min. recommended	mm 41	20	10
max. recommended	mm 180	90	45
max. extended	mm 260	130	65
pipe wall thickness			
min.	mm 2.2	1.1	0.6
material			
housing	PI with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)		
contact surface	PI		
degree of protection	IP66		IP56
transducer cable			
type	6111		
length	m 4		3
length (**-****/LC)	m 9		
dimensions			
length l	mm 64		40
width b	mm 32		22
height h	mm 40.5		25.5
dimensional drawing			
weight (without cable)	kg 0.066		0.017
pipe surface temperature			
min.	°C 100		100
max.	°C 240 ¹		200
ambient temperature			
min.	°C -30		-30
max.	°C +40 +200 ²		+200
temperature compensation	x		
explosion protection			
• ATEX/IECEx			
order code	GSM-EA1T1/**	GSP-EA1T1/**	GSQ-EA1T1/**
pipe surface temperature (Ex)			
• min.	°C -45		
• max.	°C +225 ¹		
marking	CE 0637 Ex II2G II2D Ex q IIC T6...T2 Gb Ex tb IIIA T80 °C...T230 °C Db		
certification ATEX	IBExU07ATEX1168 X		
certification IECEx	IECEx IBE 08.0007X		

¹ > +200 °C :

Variofix C

observe the insulation instruction



ambient temperature max. +40 °C

² pipe surface temperature max. +200 °C

Transducer mounting fixture

Order code



1, 2 transducer fixture	3 transducer	4 measurement arrangement	5 size	6 fixation	7...9 outer pipe diameter	/	option	no. of character description
VC								Variofix C
WI								transducer box for WavelInjector
	K							transducers with transducer frequency G, K
	M							transducers with transducer frequency M, P
	Q							transducers with transducer frequency Q
	D							diagonal arrangement
		S						small
		L						large
		S						tension straps
			002					10...20 mm
			004					20...40 mm
			T36					40...360 mm
			013					10...130 mm
			036					130...360 mm
			092					360...920 mm
			200					920...2000 mm
			Z					special design

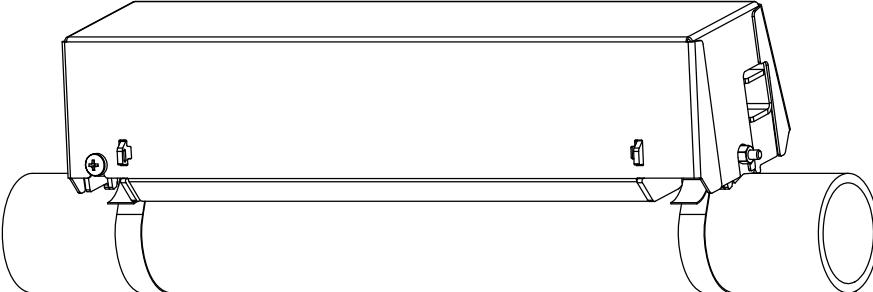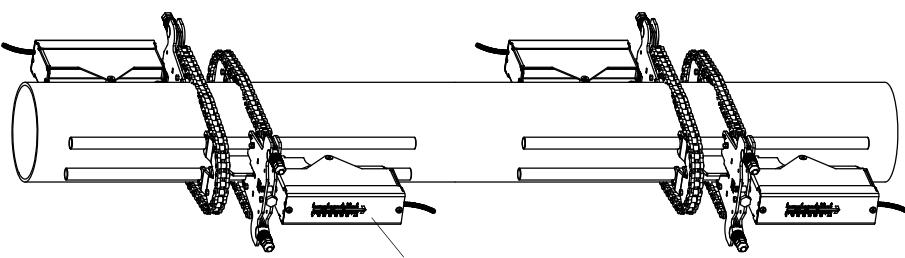Variofix C (VC) 	material: stainless steel 316Ti (1.4571) inner length: VCK-*L: 500 mm VCK-*S: 350 mm VCM: 400 mm VCQ: 250 mm dimensions: VCK-*L: 560 x 126 x 125 mm VCK-*S: 410 x 126 x 125 mm VCM: 460 x 96 x 82 mm VCQ: 310 x 85 x 71 mm
transducer box WI for WavelInjector 	see Technical specification TSWavelInjectorVx-x

Coupling materials for transducers

type	ambient temperature °C	remark
coupling foil type VT	-10...+200	fluid temperature 200 °C: min. 2 years
coupling foil type TF	200...240	
coupling compound type E	-30...+200	in combination with type VT only
coupling compound type H	-30...+250	in combination with type TF only
coupling foil type A	max. 280	WaveInjector
coupling foil type B	280...400	WaveInjector

Connection systems

connection system T1		
connection with extension cable	direct connection	transducers technical type
JB01 	transmitter 	*****8*
connection system TS		
JB02, JB03, JB04 	transmitter 	*****52

Cable

transducer cable			
type	1699	6111	
weight kg/m	0.094	0.092	
ambient temperature °C	-55...+200	-100...+225	
cable jacket			
material	PTFE	PFA	
outer diameter mm	2.9	2.7	
thickness mm	0.3	0.5	
colour	brown	white	
shield	x	x	
sheath			
material	stainless steel 304 (1.4301) option OS: 316Ti (1.4571)	stainless steel 304 (1.4301) option OS: 316Ti (1.4571)	
outer diameter mm	8	8	
extension cable			
type	2615	5245	
order code	ACC-PE- GN NN-/EXXXXX	ACC-PE- GN NN-/EXA1XXX	
weight kg/m	0.18	0.38	
ambient temperature °C	-30...+70	-30...+70	
properties	halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2	halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2	
cable jacket			
material	PUR	PUR	
outer diameter mm	max. 12	max. 12	
thickness mm	2	2	
colour	black	black	
shield	x	x	
sheath			
material	-	steel wire braid with copolymer sheath	
outer diameter mm	-	max. 15.5	

XXX - cable length in m

Cable length

transducer frequency	G, K		M, P		Q	
connection system TS						
transducers	x	l	x	l	x	l
technical type						
*D***8*	m	5	≤ 300	4	≤ 300	3
option LC: *L***8*	m	9	≤ 300	9	≤ 300	9
*D***5*	m	5	≤ 300	4	≤ 300	3
option LC: *L***5*	m	9	≤ 300	9	≤ 300	9

x - transducer cable length

l - max. length of extension cable (depending on the application)


Junction box

Technical data

JB01S4E3M

weight	kg	1.2 kg
fixation		wall mounting optional: 2" pipe mounting
material		
housing		stainless steel 316L (1.4404)
gasket		silicone
degree of protection		IP67
ambient temperature		
min.	°C	-40
max.	°C	+80
explosion protection		
• ATEX/IECEx		
marking		CE 0637 II2G Ex II2D Ex eb mb IIC T6...T4 Gb Ex tb IIIC T100 °C Db Ta -40...+70/80 °C
certification ATEX		IIBExU06ATEX1161
certification IECEx		IECEx IBE 08.0006
type of protection		gas: increased safety decoupled network: encapsulation dust: protection by enclosure

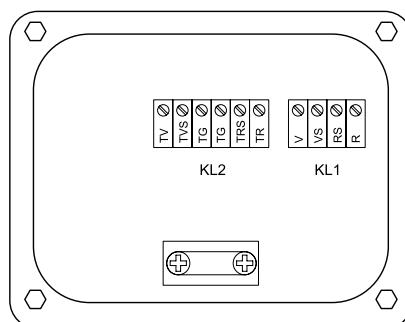Connection



Transducers

terminal strip	terminal	connection	transducer
KL1	V	signal	↑
	VS	internal shield	
	RS	internal shield	↗
	R	signal	↘


Extension cable

terminal strip	terminal	connection
KL2	TV	signal
	TVS	internal shield
	TRS	internal shield
	TR	signal

JB02, JB03, JB04

weight	kg	1.2 kg
fixation		wall mounting optional: 2" pipe mounting
material		
housing		stainless steel 316L (1.4404)
gasket		silicone
degree of protection		IP67
ambient temperature		
min.	°C	-40
max.	°C	+80
explosion protection		
• ATEX		
junction box		JB02
marking		CE Ex II3G Ex nA IIC (T6)...T4 Gc II3D Ex tc IIIC T 100 °C Dc Ta -40...+(70)80 °C
FM		
junction box		JB04
marking		FM APPROVED NI/Cl. I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ T6 Ta = -40...+60 °C

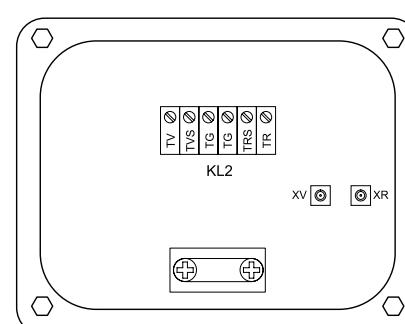Connection




Transducers

terminal strip	terminal	connection	transducer
	XV	SMB connector	↑
	XR	SMB connector	↗

Extension cable

terminal strip	terminal	connection
KL2	TV	signal
	TVS	internal shield
	TRS	internal shield
	TR	signal

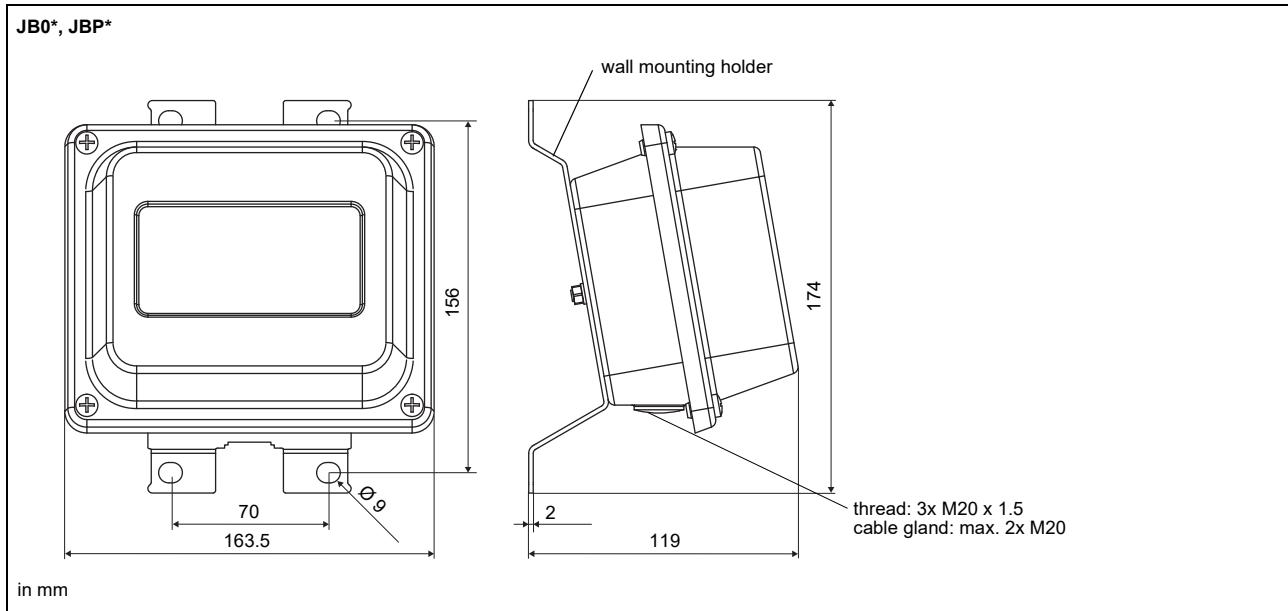Dimensions












2" pipe mounting kit



Clamp-on temperature probe (optional)

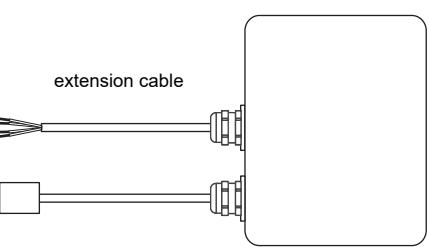Technical data

PT12N		Connection system	
		connection with extension cable	direct connection
order code design type connection measuring range accuracy T response time housing degree of protection dimensions		 extension cable	
			
weight		kg 0.25	
accessories			
thermal conductivity foil 250 °C	x		
temperature probe			
		red	
		red/blue	
		white/blue	
		white	
Cable			
		temperature probe	extension cable
type		4 x 0.22 mm ²	LIYCY 8 x 0.14 mm ²
standard length		m 3	5/10/25
max. length		m -	200
ambient temperature		°C -30...+250	-25...+80
min. bend radius		mm 27	68
cable jacket			
material		PFA	PVC
outer diameter		mm 3.8 ±0.15	4.8 ±2
colour		black	grey

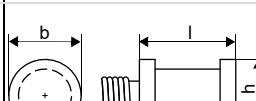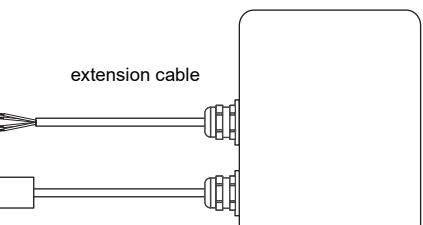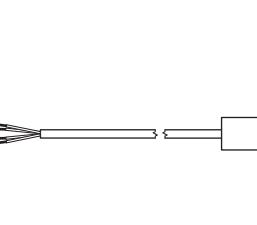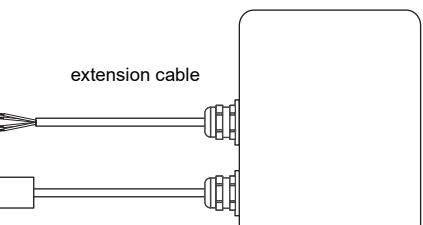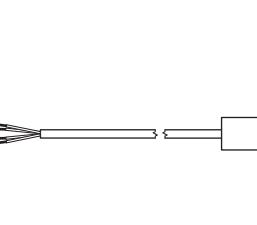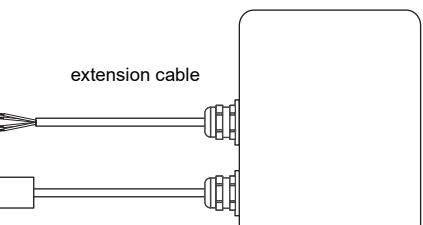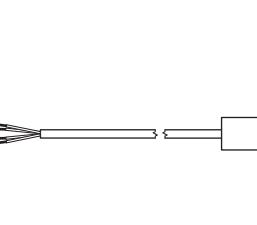PT12N																			
order code	• ACC-PE-GNNN-/T322																		
design	clamp-on ATEX																		
type	Pt100																		
connection	4-wire																		
measuring range °C	-30...+250																		
accuracy T	$\pm(0.15^\circ\text{C} + 2 \cdot 10^{-3} \cdot \text{T} [^\circ\text{C}])$ class A																		
response time s	50																		
housing	aluminum																		
degree of protection	IP67																		
dimensions																			
length l mm	20																		
width b mm	15																		
height h mm	13																		
dimensional drawing																			
weight kg	0.25																		
accessories																			
thermal conductivity foil 250 °C	x																		
explosion protection																			
• ATEX																			
marking																			
Connection system																			
<table border="1"> <thead> <tr> <th>connection with extension cable</th> <th>direct connection</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> </tr> </tbody> </table>		connection with extension cable	direct connection																
connection with extension cable	direct connection																		
																			
Connection																			
<table border="1"> <thead> <tr> <th>temperature probe</th> </tr> </thead> <tbody> <tr> <td>red</td> </tr> <tr> <td>red/blue</td> </tr> <tr> <td>white</td> </tr> <tr> <td>white/blue</td> </tr> </tbody> </table>		temperature probe	red	red/blue	white	white/blue													
temperature probe																			
red																			
red/blue																			
white																			
white/blue																			
Cable																			
<table border="1"> <thead> <tr> <th></th> <th>temperature probe</th> <th>extension cable</th> </tr> </thead> <tbody> <tr> <td>type</td> <td>4 x 0.25 mm²</td> <td>LIYCY 8 x 0.14 mm²</td> </tr> <tr> <td>standard length m</td> <td>3</td> <td>5/10/25</td> </tr> <tr> <td>max. length m</td> <td>-</td> <td>200</td> </tr> <tr> <td>ambient temperature °C</td> <td>-30...+250</td> <td>-25...+80</td> </tr> <tr> <td>min. bend radius mm</td> <td>19</td> <td>68</td> </tr> </tbody> </table>			temperature probe	extension cable	type	4 x 0.25 mm²	LIYCY 8 x 0.14 mm²	standard length m	3	5/10/25	max. length m	-	200	ambient temperature °C	-30...+250	-25...+80	min. bend radius mm	19	68
	temperature probe	extension cable																	
type	4 x 0.25 mm²	LIYCY 8 x 0.14 mm²																	
standard length m	3	5/10/25																	
max. length m	-	200																	
ambient temperature °C	-30...+250	-25...+80																	
min. bend radius mm	19	68																	
cable jacket																			
<table border="1"> <tbody> <tr> <td>material</td> <td>PTFE</td> <td>PVC</td> </tr> <tr> <td>outer diameter mm</td> <td>3.8</td> <td>4.8 ±2</td> </tr> <tr> <td>colour</td> <td>black</td> <td>grey</td> </tr> </tbody> </table>		material	PTFE	PVC	outer diameter mm	3.8	4.8 ±2	colour	black	grey									
material	PTFE	PVC																	
outer diameter mm	3.8	4.8 ±2																	
colour	black	grey																	

Fixation

tension strap PT12N

The diagram illustrates a tension strap PT12N. It consists of a coiled strap with a threaded end, which is attached to a metal hook. The strap is shown in a coiled state, with one end extending to the left and the other end being secured by the hook.


material: stainless steel 301 (1.4310),
410 (1.4006)
thermal insulation necessary

Junction box

JBT2, JBT3

order code		• JBT2: ACC-PE-GNNN-JB4 • JBT3: ACC-PE-GNNN-JB6
weight	kg	1.2 kg
fixation		wall mounting optional: 2" pipe mounting
material		
housing		stainless steel 316L (1.4404)
gasket		silicone
degree of protection		IP67
ambient temperature		
min.	°C	-40
max.	°C	+80
explosion protection		
• ATEX		
junction box		JBT2
marking		

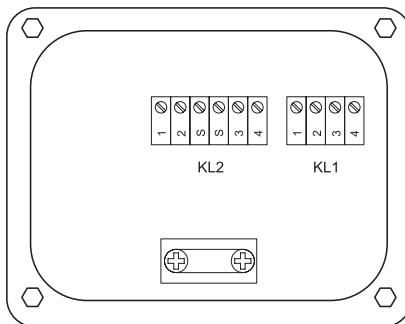Connection



Temperature probe


terminal strip	terminal	connection
KL1	1	red
	2	red/blue
	3	white
	4	white/blue

Extension cable


terminal strip	terminal	connection
KL2	1	red
	2	grey
	3	white
	4	blue

Dimensions

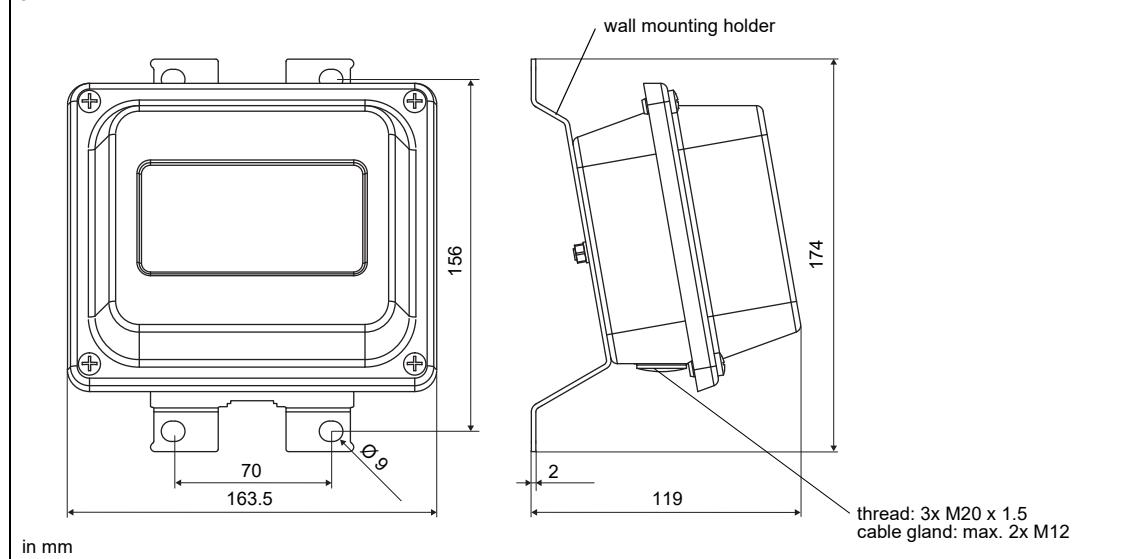JBT*



2" pipe mounting kit

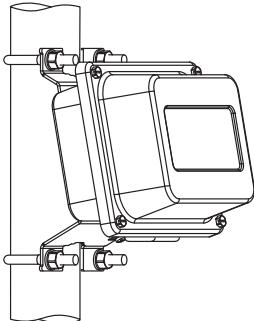JB**		order code: ACC-PE-GNNN-/JBPMK4
-------------	---	------------------------------------



FLEXIM GmbH
Boxberger Str. 4
12681 Berlin
Germany

Tel.: +49 (30) 93 66 76 60
Fax: +49 (30) 93 66 76 80

internet: www.flexim.com
e-mail: info@flexim.com

Subject to change without prior notice.
Errors excepted.

FLUXUS is a registered trademark of FLEXIM GmbH.

Copyright (©) FLEXIM GmbH 2021