

EXdip 910 DN50 / ANSI 2" stainless steel




- » Robust design
- » Integrated orbital sensor cleaning system
- » Extension of sensor-lifetime and reduction of maintenance efforts
- » Easy installation and removal of the sensor holder
- » Stainless steel AISI 316L / 1.4404
- » Immersion length 500-2500mm
- » Minimum size DN50 / 2"

EXdip 910 is an immersion fitting made of stainless steel with flanged connection and integrated orbital sensor cleaning system for nominal diameter DN50 / 2".

Spezifikationen

Process pressure:	0...10 bar
Process temperature:	-10...140 °C
Material:	1.4404 / AISI 316L
Sealing material:	EPDM or FPM (Viton)
Immersion lengths:	0.5 up to 2.5 meters
Flange sizes:	DIN DN50 / ANSI 2"
Sensor cleaning:	integrated orbital spray cleaning (option)
Certificates:	material

Abmessungen

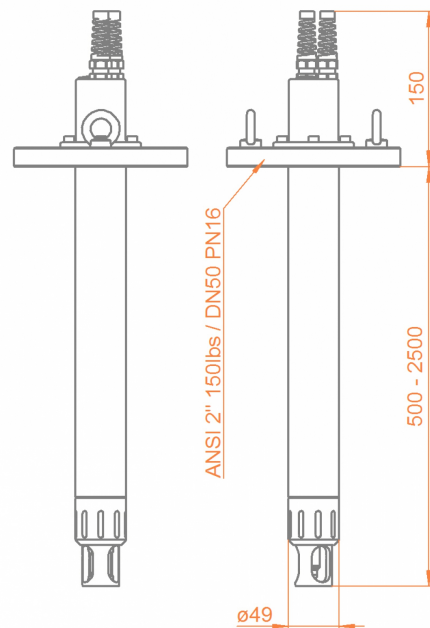

EXdip 910 DN50 / ANSI 2" stainless steel



Protective cage and coupling nut for the installation and removal of the sensor



Cleaning nozzles integrated in the protective cage of EXdip 910



Flanges according to DIN and ANSI standard

Ordercode

Code	Material (wetted parts)	Lieferzeit
4404	Stainless steel 1.4404 / 316L	3 Wochen
Code	Sealing material (wetted sealings)	Lieferzeit
EPD	EPDM/FDA/USP VI	3 Wochen
FPM	FPM (Viton)	3 Wochen
Code	Sensor type	Lieferzeit
120	120mm PG 13,5 Ø12mm	3 Wochen
N34	for sensor types with MNPT 3/4" (only "NC")	6 Wochen
N10	for sensor types with MNPT 1" (only "NC")	6 Wochen
Code	Process connection	Lieferzeit
D50	Flange DN50 PN16	3 Wochen
A20	Flange ANSI 2" 150lbs	3 Wochen
Code	Immersion length	Lieferzeit
05	0.5 meter	3 Wochen
10	1 meter	3 Wochen
15	1.5 meters	3 Wochen
20	2 meters	3 Wochen
25	2.5 meters	3 Wochen
Code	Cleaning	Lieferzeit
NC	without	3 Wochen
SC	with integrated spray cleaning	3 Wochen