

EXstatic 315 15°- angled process connection




- » Designed according to hygienic criteria
- » Surface finish $Ra < 0,78$ or $Ra < 0,37$
- » Stainless steel AISI 316L / 1.4404
- » EPDM sealings with FDA and USP VI approval
- » Process connections with EHEDG / 3A approval
- » Up to 10 bar and 140 °C
- » Protection cap for cable connection

Static probe housing with 15°-angled process connections for permanent installation of $\varnothing 12\text{mm}/120\text{mm}$ -sensors in tanks or pipes mainly in hygienic applications

Specifications

Process pressure:	0...10 bar
Process temperature:	-10...140 °C
Material:	1.4404 / 316L
Surface:	$Ra < 0,78$ or $Ra < 0,37$
Sealing material:	EPDM / FDA / USP VI or FPM (Viton)
Material cable guard:	PA6.6 GF30
Certificates:	material, surface, sealing material
Design:	without protection cage
Process connection:	TriClamp 1-1.5" ($\varnothing 50,5$), TriClamp 2" ($\varnothing 64$), Varivent N or Neumo BioControl D50
Sensors:	120 mm $\varnothing 12$ PG13,5


Dimensions

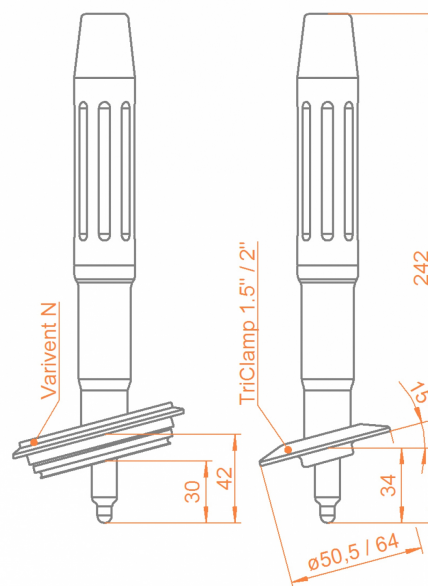

EXstatic 315 15°- angled process connection



Process connection TriClamp 1.5" / 15° angled

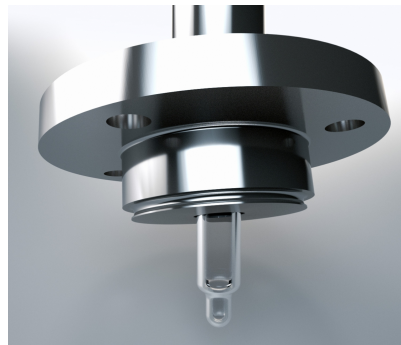

Process connection NEUMO BioControl D50 / 15° angled



Installation example: left EXstatic 310, right EXstatic 315

Order code

Code	Material (wetted parts)	Delivery time
0408	Stainless Steel 1.4404 / 316L Ra0,78	2 Weeks
0404	Stainless Steel 1.4404 / 316L Ra0,37	4 Weeks
Code	Sealing material (wetted sealings)	Delivery time
EPD	EPDM/FDA/USP VI	2 Weeks
FPM	FPM (Viton)	2 Weeks
Code	Sensor type	Delivery time
120	120mm PG 13,5 Ø12mm	2 Weeks
Code	Process connection	Delivery time
VARN	Varivent N DN40-125	4 Weeks
TC20	TriClamp 2.0 (OD Ø64mm)	2 Weeks
TC15	TriClamp 1-1,5" (OD Ø50.5mm)	2 Weeks
BCT5	NEUMO BioControl D50	4 Weeks
Code	Immersion length	Delivery time
034	34mm under process connection	2 Weeks
Code	Protection cage	Delivery time
0	without	2 Weeks