

# Datasheet L23V12

## Mass Flow Controllers for Liquids

### > Introduction

Bronkhorst® model L23V12 Liquid Flow Controllers (LFCs) are suited for precise measurement and control of low flow ranges. The LFC consists of a thermal mass flow sensor and a microprocessor based pc-board with signal and fieldbus conversion and a PID controller for mass flow control by means of an integrated control valve. The mass flow, expressed in grams per hour, is provided as analog signal or digitally via RS232 or optional fieldbus. The liquid flow controllers are scaled and calibrated according to customer's requirements.



LIQUI-FLOW™ Mass Flow Controllers model L23V12

### > Technical specifications

#### Measurement / control system

Accuracy (incl. linearity) (Based on actual calibration)	: ± 1% FS
Turndown	: 1 : 50 (2...100%)
Repeatability	: ±0,2% FS typical H <sub>2</sub> O
Operating temperature	: 5...50°C
Temperature sensitivity	: ± 0,1% FS/°C
Attitude sensitivity	: negligible
Warm-up time	: 30 min. for optimum accuracy 10 min. for accuracy ± 2% FS

#### Mechanical parts

Material (wetted parts)	: stainless steel 316L/320; others on request
Process connections	: 1/8", 1/4" or 6 mm OD compression
Purge connection	: 1/16" OD compression type
Seals	: Kalrez®-6375; others on request
Ingress protection (housing)	: IP40
Pressure rating	: 100 bar abs

*Although all specifications in this datasheet are believed to be accurate, the right is reserved to make changes without notice or obligation.*

#### Electrical properties


Power supply	: +15...24 Vdc ±10%		
Power consumption	: Supply	at voltage I/O	at current I/O
	15 V	285 mA	305 mA
	24 V	250 mA	270 mA
Extra for fieldbus: (if applicable)	PROFIBUS DP: add 53 mA (15 V supply) or 30 mA (24 V supply) EtherCAT®: add 66 mA (15 V supply) or 41 mA (24 V supply) DeviceNet™: add 48 mA (24 V supply)		
Analog output (0...100%)	: 0...5 (10) Vdc, min. load impedance > 2 kΩ; 0 (4)...20 mA (sourcing), max. load impedance < 375 Ω		
Analog setpoint (0...100%) (for LFM + control valve)	: 0...5 (10) Vdc, min. load impedance > 100 kΩ; 0 (4)...20 mA, load impedance ~250 Ω		
Digital communication	: standard RS232; options: PROFIBUS-DP, DeviceNet™, Modbus-RTU/ASCII, EtherCAT®, FLOW-BUS		

### > Ranges (based on water)

Model	min. flow	max. flow
L23V12	2...100 g/h	20...1000 g/h


*Intermediate ranges are available*

## > Model number identification

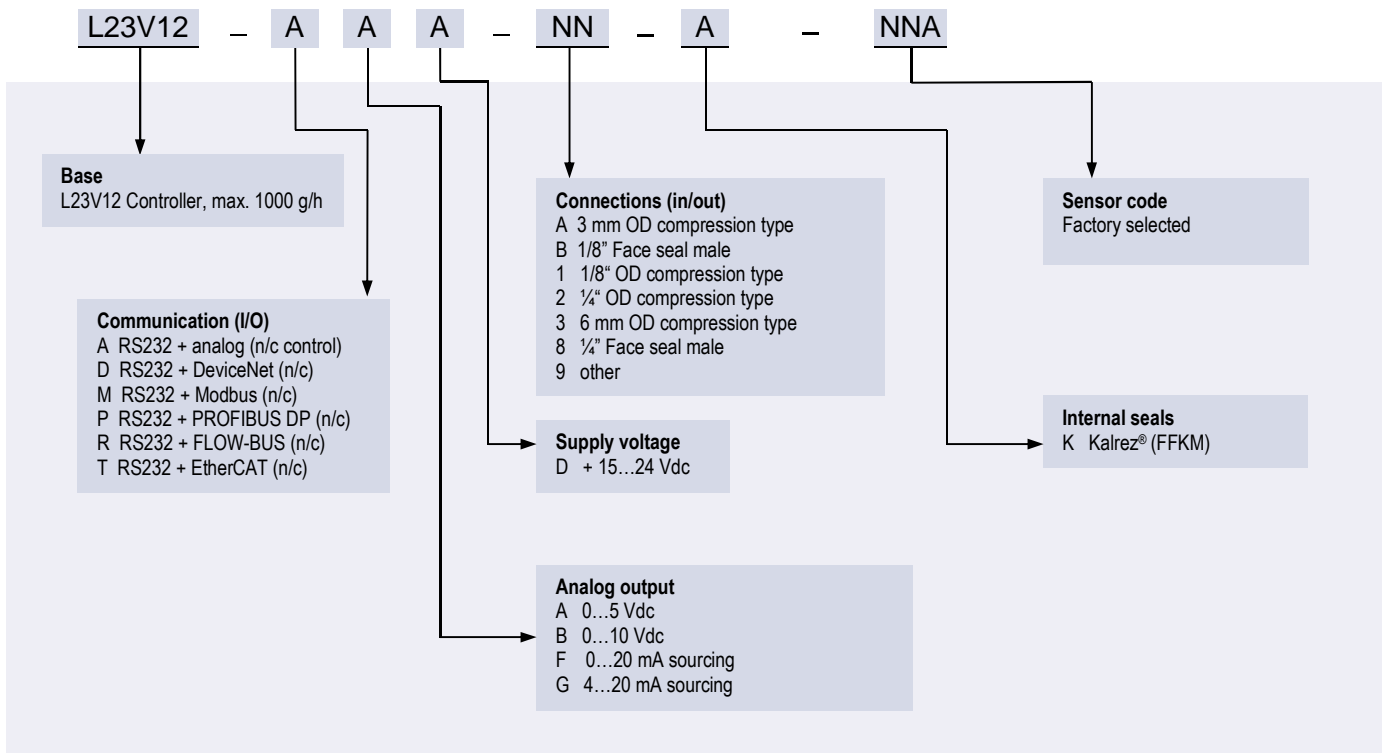

## > Thermal mass flow measuring principle


A LIQUI-FLOW™ thermal Mass Flow Meter for liquids is basically a stainless steel tube without any moving parts or built-in obstructions. The heater/sensor assembly is arranged around the tube and, by following the anemometric principle, a constant difference in temperature ( $\Delta T$ ) is created and the energy ( $P$ ) required to maintain the  $\Delta T$  is dependent of the mass flow rate. Due to the benefits of the unique patented sensor, the fluid will be warmed to a maximum of 5°C, thereby making the LIQUI-FLOW™ series suitable for fluids with low boiling points.

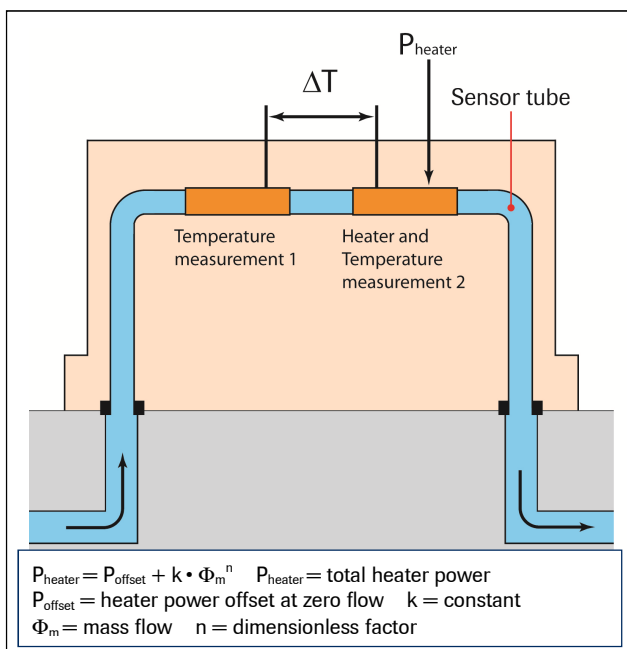

Functional scheme of the thermal mass flow sensor


## > State of the art digital design

Today's LIQUI-FLOW™ series are equipped with a digital pc-board, offering high accuracy, excellent temperature stability and fast response. The basic digital pc-board contains all of the general functions needed for measurement and control. In addition to the standard RS232 output the instruments also offer analog I/O. Furthermore, an integrated interface board provides DeviceNet™, PROFIBUS DP, Modbus-RTU/ASCII, EtherCAT® or FLOW-BUS protocols.

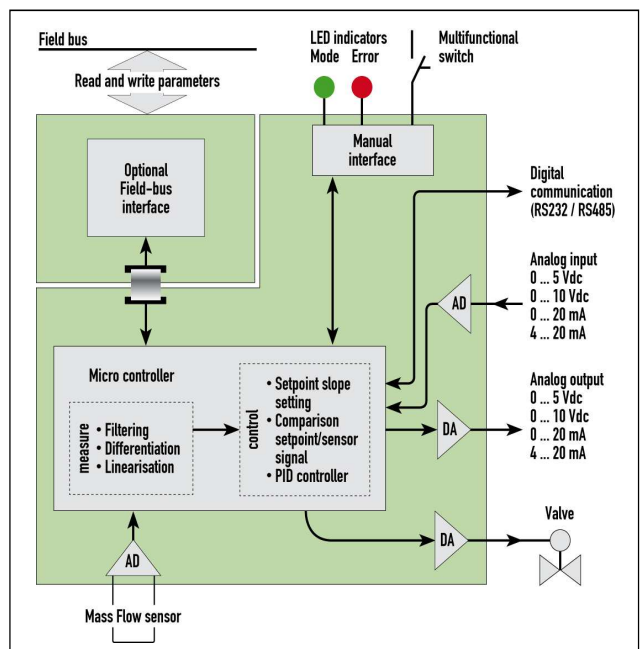


Functional scheme of the digital PC-board

## > Hook-up diagram for analog or RS232 communication

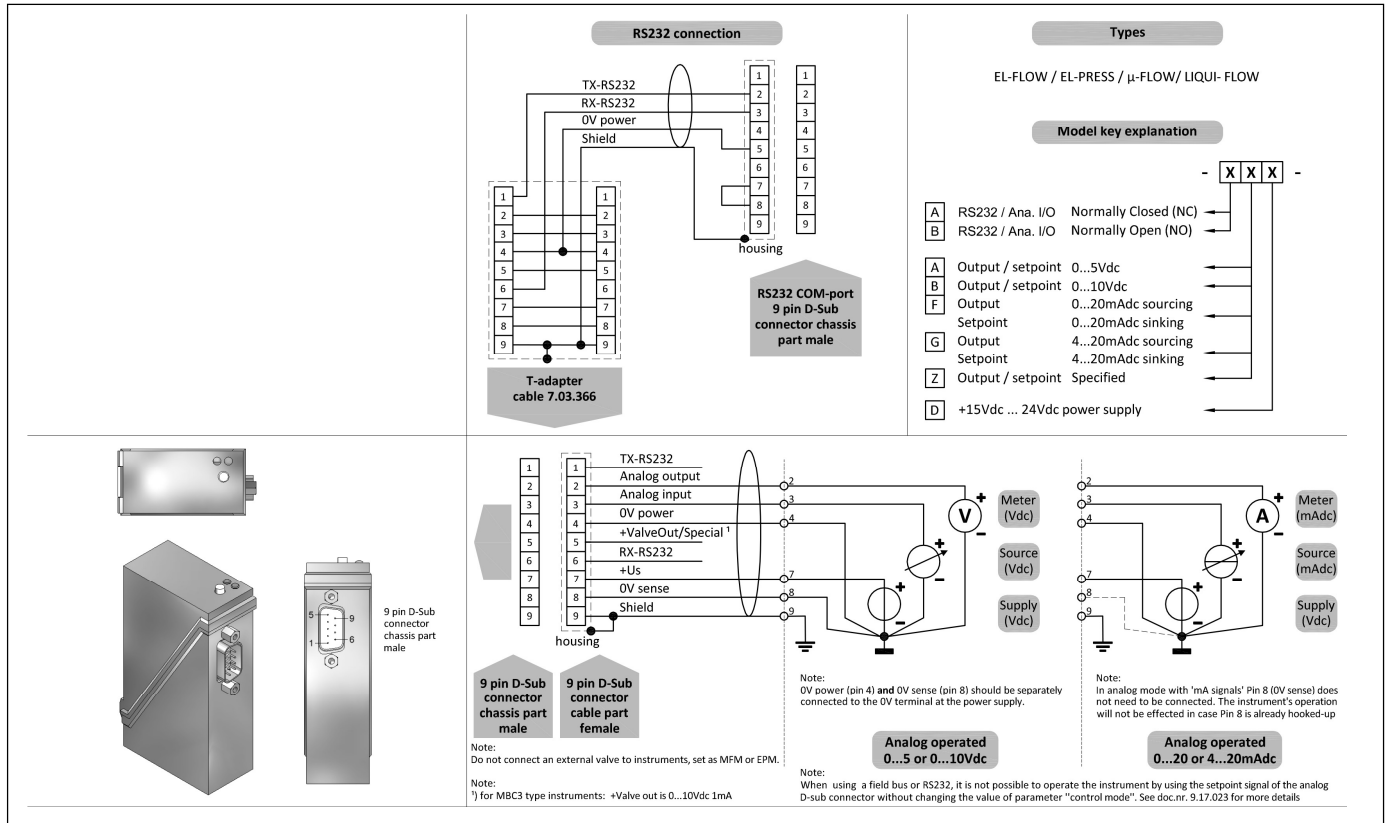


## > Hook-up diagrams for fieldbus communication

For the available fieldbus options we refer to the various hook-up diagrams as indicated below. If you are viewing this datasheet in digital format, you may use the hyperlink to each of the drawings. Otherwise please visit the download section on [www.bronkhorst.com](http://www.bronkhorst.com) or contact our local representatives.

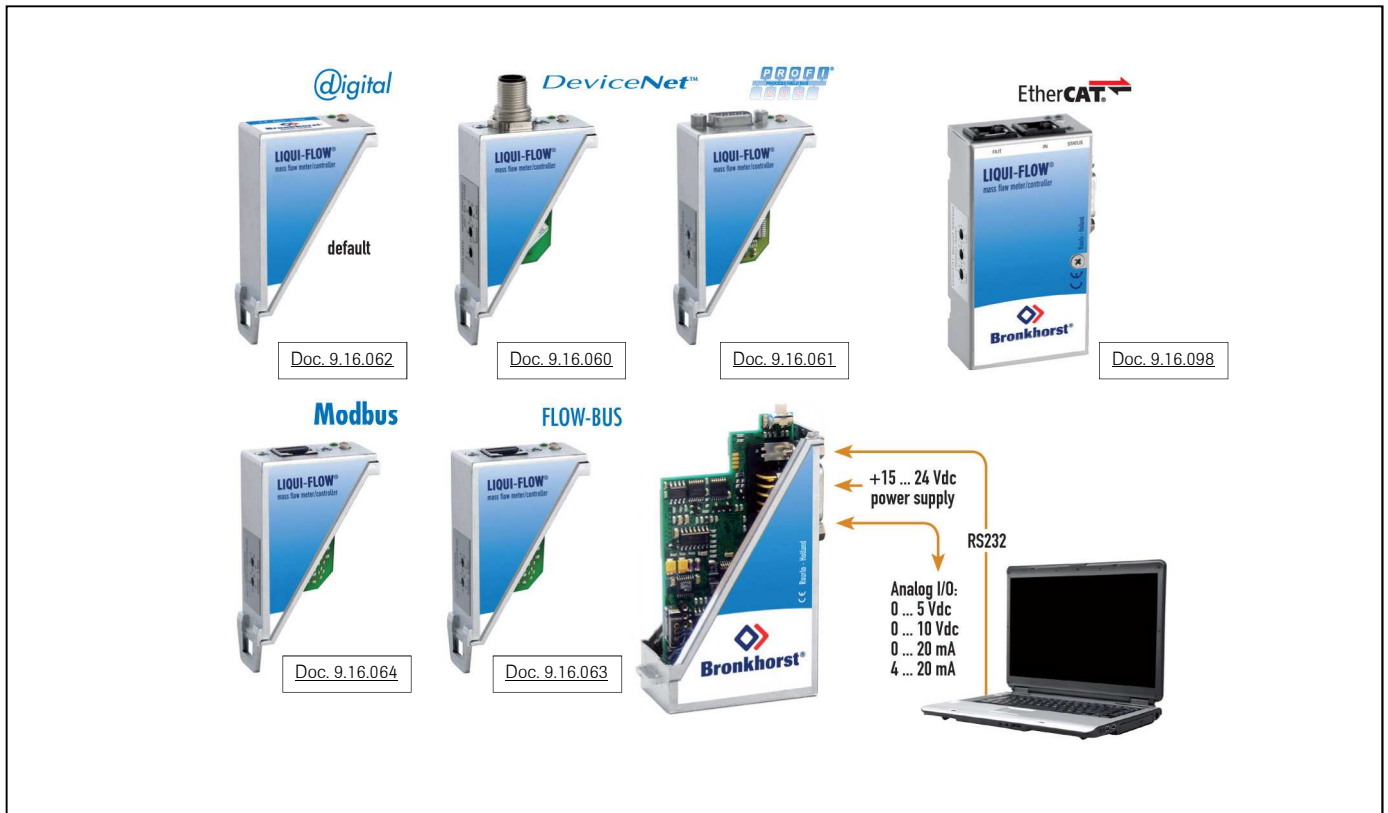

## > Dimensions (mm) and weight (kg)

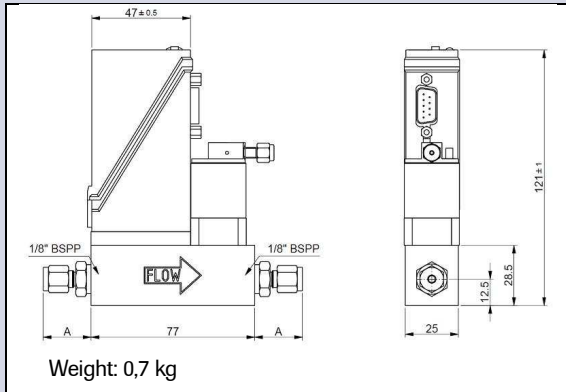


Dimension table adapters (RS-type)

Compression type			1/4"BSPP
adapter	Size	OD	Size A
adapter 3 mm	OD		26.1
adapter 6 mm	OD		28.4
adapter 8 mm	OD		29.4
adapter 10 mm	OD		30.2
adapter 12 mm	OD		32.5
adapter 1/8"	OD		26.1
adapter 1/4"	OD		28.4
adapter 3/8"	OD		29.9
adapter 1/2"	OD		32.7

Face-seal			1/4"BSPP
adapter	Size	inlet	A
adapter 1/8"		inlet	19.3
adapter 1/4"		inlet	23.2

Compression type



\*) Dimension A is typical finger-tight.

## > Options and accessories

<ul style="list-style-type: none"> <li>- Free software support for operation, monitoring, optimizing or to interface between digital instruments and windows software.</li> </ul>	
<ul style="list-style-type: none"> <li>- BRIGHT compact local Readout/Control module</li> <li>- E-8000 Power Supply</li> </ul>	
<ul style="list-style-type: none"> <li>- Interconnecting cables for power and analog/digital communication</li> <li>- PiPS Plug-in Power Supply</li> </ul>	

## > Alternatives

<ul style="list-style-type: none"> <li>- LIQUI-FLOW™ Liquid Flow Controller model L13V12 (5...100 g/h FS)</li> </ul>	
<ul style="list-style-type: none"> <li>- LIQUI-FLOW™ Liquid Flow Meter model L23 (100...1000 g/h FS)</li> </ul>	
<ul style="list-style-type: none"> <li>- LIQUI-FLOW™ Industrial Style Liquid Flow Meter model L23I with close coupled control valve (100...1000 g/h FS)</li> </ul>	

